

F

E

D

C

B

A

Catalog Id		Conductor			Stud Size	Dimensions						Color Code	Installation Tooling				Dieless	
Without Inspection Window (Fig-1)	With Inspection Window (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range		OD	L	B	A	W	T		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IlSCO ILC-12-N, ILC-12-H-N, ILCB-12	Huskie Model - EP-510C Die Index	Greenlee HK1240		
BT98087A	PBT98087A	#3	#4	#3 - #6	5/16	0.37 [9.60]	2.87 [73.00]	1.10 [28.00]	1.61 [41.00]	0.55 [14.00]	0.09 [2.20]	White	U2CRT	-	29	HT41AW	-	Burndy Dieless - PAT444S & PAT4PC834LI. IlSCO Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DFF1000-P, IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.
BT98087B	PBT98087B				3/8	0.37 [9.60]	3.07 [78.00]	1.10 [28.00]	1.81 [46.00]	0.59 [15.00]	0.08 [2.00]							
BT98087C	PBT98087C				1/4	0.37 [9.60]	2.51 [64.00]	1.10 [28.00]	1.26 [32.00]	0.50 [12.70]	0.09 [2.40]							
BT98087D	PBT98087D				1/4	0.37 [9.60]	2.64 [67.00]	1.10 [28.00]	1.38 [35.00]	0.50 [12.70]	0.09 [2.40]							
BT98087E	PBT98087E				1/2	0.38 [9.60]	4.62 [117.35]	1.25 [31.75]	3.01 [76.45]	0.83 [21.08]	0.12 [3.05]							

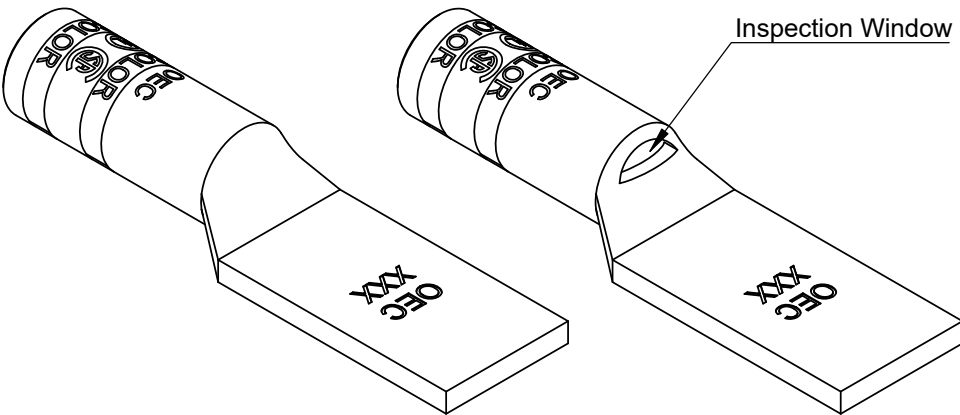
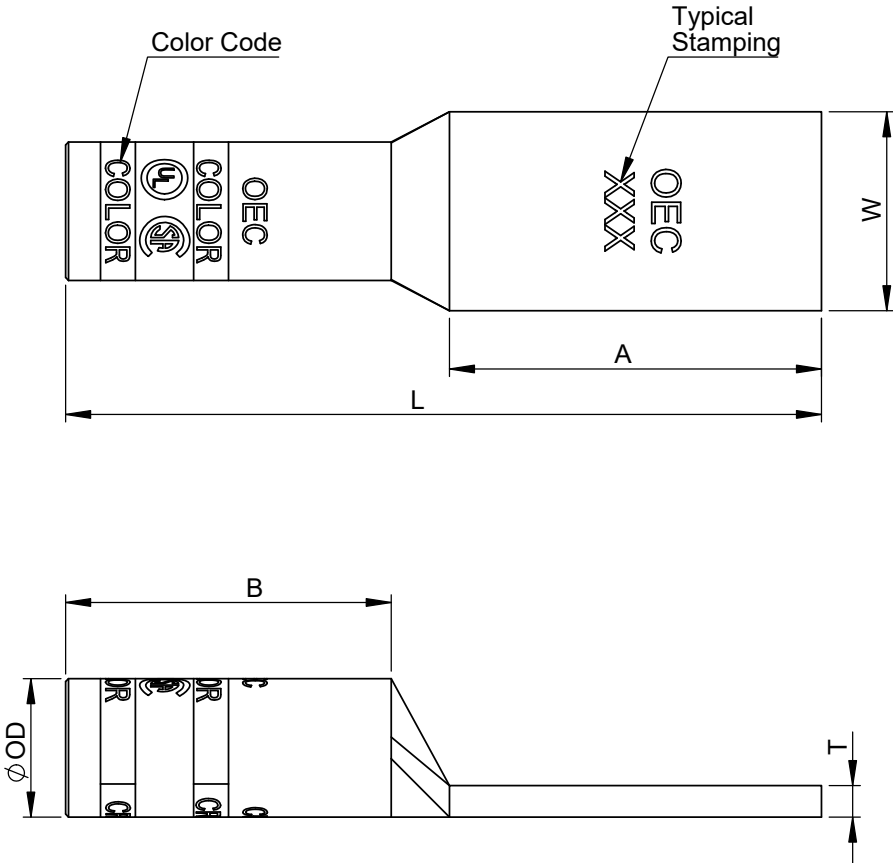


Fig-1

Fig-2



- Note:
- Manufactured from high strength seamless Copper tubing
 - Color coded die index and crimp marks
 - Electro-Tin plated for corrosion resistance
 - Pre-filled with oxide inhibitor and capped with color coded cap.
 - UL486A/B Listed for Wire Connectors
 - UL Listed and CSA Certified with competitor's compression tools
 - Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
For Short Barrel Connectors, apply 1 crimp,
For Long Barrel Connectors, apply 2 crimps on the color coded bands

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

					TOLERANCE				
					OD	L	B	A	W
					±0.20	±1.0	±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015			NAME	DATE	<div> Usa Inc.</div> <div>106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com</div>			
		DRAWN	R.P.	08.03.25				
		CHECK	S.P.	08.03.25				
		APPROVED	M.K.	08.03.25				
DWG. NO. OC-0014		PROJECTION:	FIRST ANGLE	SIZE A3	TITLE: Copper Two Hole Long Barrel Compression Lug Blank Tang			
MATERIAL Refer Note								
FINISH Refer Note								
					Cat Id. BT98087A - BT98087E		REV	
					DO NOT SCALE DRAWING		SHEET 4 OF 19	

F

E

D

C

B

A