

F

E

D

C

B

A

F

E

D

C

B

A

Catalog Id		Conductor			Stud Size	Dimensions								Color Code	Installation Tooling					Dieless
Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range		OD	L	B	A	W	T	ØF	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilsco ILC-12-N, ILC-12-H-N, ILCB-12		Huskie Model - EP-510C Die Index	Greeniee HK1240	
98028	F98028	#4/0	#3/0	#4/0 - #1	1/4	0.68 [17.50]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	1.00 [25.4]	0.13 [3.40]	0.25 [6.40]	0.47 [12.00]	Purple	U28RT	ILD-12	ILD - 54	HT41BC	KC12-4/0	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.
98029	F98029				5/16	0.68 [17.50]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	1.00 [25.4]	0.13 [3.40]	0.33 [8.40]	0.47 [12.00]							
98030	F98030				3/8	0.68 [17.50]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	1.00 [25.4]	0.13 [3.40]	0.41 [10.50]	0.47 [12.00]							
98031	F98031				1/2	0.68 [17.50]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	1.00 [25.4]	0.13 [3.40]	0.51 [13.00]	0.47 [12.00]							


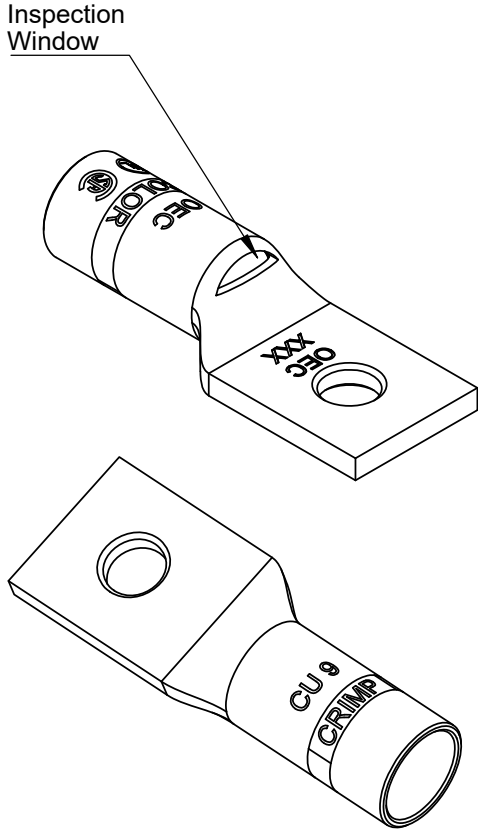


Fig-1

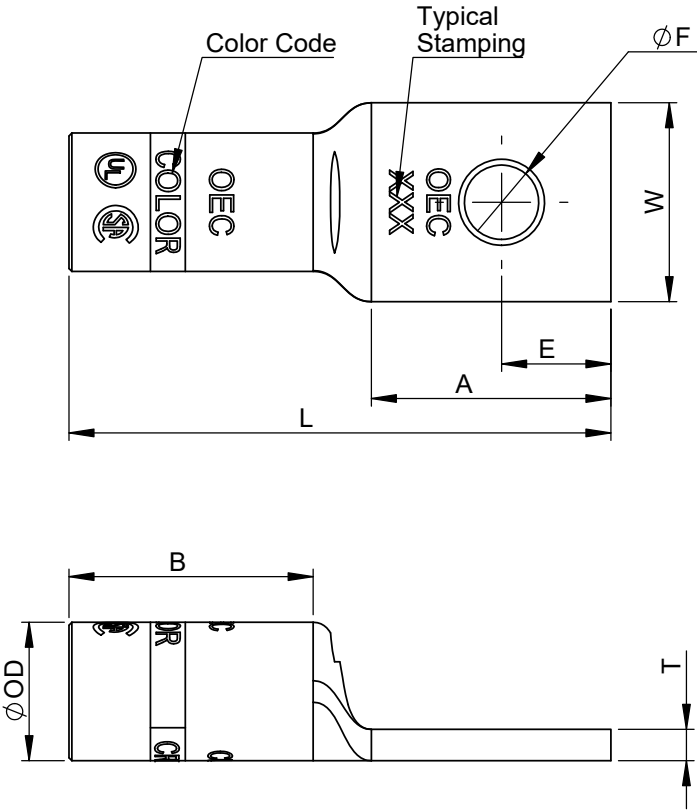




Fig-2

- Note:
- Manufactured from high strength seamless Copper tubing
 - Color coded die index and crimp marks
 - Electro-Tin plated for corrosion resistance
 - Pre-filled with oxide inhibitor and capped with color coded cap.
 - UL486A/B Listed for Wire Connectors
 - UL Listed and CSA Certified with competitor's compression tools
 - Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
For Short Barrel Connectors, apply 1 crimp,
For Long Barrel Connectors, apply 2 crimps on the color coded bands

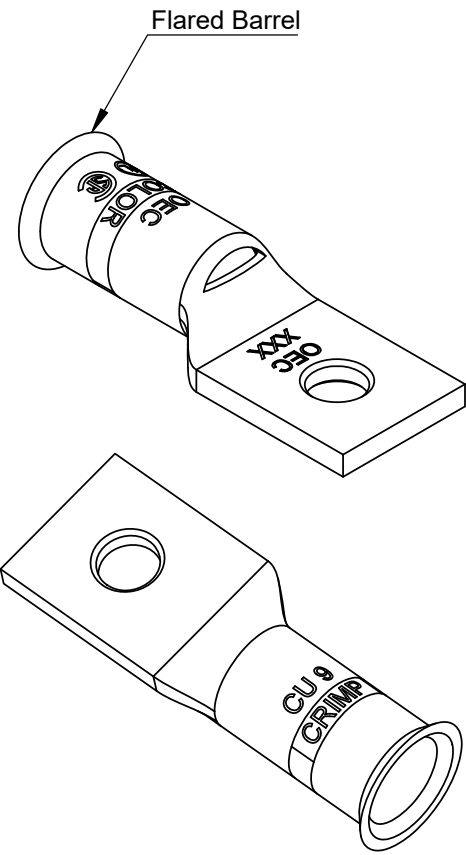THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

TOLERANCE						
OD	L	B	A	W	Ø F	
±0.20	±1.0	±0.50	±0.50	±1.0	±0.20	
TOLERANCES-UNLESS OTHERWISE SPECIFIED		NAME	DATE	<div> Usa Inc.</div> <div>106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com</div>		
2 PL. DEC. ±.015 TRUE C.L. ±.015		DRAWN	R.P.			14.02.25
3 PL. DEC. ±.015 ANGLES ±.015		CHECK	S.P.			14.02.25
		APPROVED	M.K.			14.02.25
DWG. NO. OC-0001		PROJECTION:  FIRST ANGLE		SIZE A3	TITLE: Copper One Hole Standard Barrel Compression Lug	
MATERIAL Refer Note						
FINISH Refer Note						
		Cat Id. 98028-98031			REV	
		DO NOT SCALE DRAWING			SHEET 10 OF 19	