

Copper, Two Hole, Standard Barrel Compression Lug, Slotted Tang

Features

- Manufactured from high strength seamless copper tubing
- Chamfered entry
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Inspection window to ensure full cable insertion
- UL486A/B Listed for Wire Connectors
- UL467 Listed for grounding and bonding applications
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Standard Material

- Copper

Standard Finish



- Electro-tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply

- Prefix 'F' for flared entry (eg. FXXXXX)

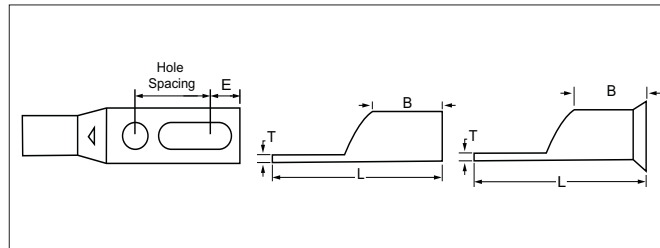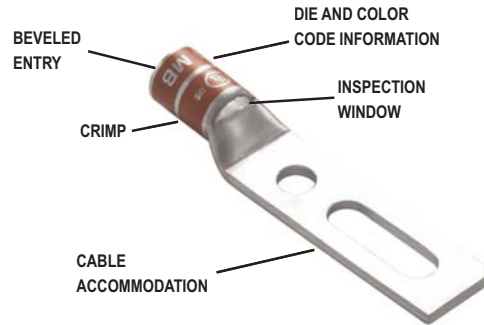

For Use With Copper Conductor Only

Catalog ID	Conductor		Stud Size	Hole Spacing	Tang Width	Dimensions In Inches				Color Code	• Installation Tooling					Dieless	
	AWG	MM²				L	B	T	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilco ILC-12-N, ILC-12-H-N, ILCB-12	Huskie Model - EP-510C Die Index	Greenlee HK1240			
ST98044	8	10	#10	5/8	0.42	1.82	0.44	0.08	0.28	RED	U8CRT	ILD - 2	ILD - 21	NA	KC12-8	Burndy Dieless - PAT444S & PAT4PC834LI.	
ST98044A			1/4	5/8	0.42	1.82	0.44	0.08	0.28								
ST98044B			3/8	1	0.56	2.37	0.44	0.05	0.41								
ST98045	6	-	1/4	5/8	0.42	2.09	0.71	0.08	0.28	BLUE	U5CRT U8CABT	ILD - 3	ILD - 24	HT41AT / HT41GL	KC12-6		
ST98045A			1/4	1	0.42	2.64	0.71	0.08	0.28								
ST98045B			3/8	1	0.57	2.64	0.71	0.06	0.38								
ST98045C			#10	3/4	0.42	2.20	0.71	0.08	0.28								
ST98046	4	-	1/4	5/8	0.49	2.09	0.71	0.09	0.28	GRAY	U4CRT U6CABT	ILD - 4	ILD -29	HT41AU / HT41GE	KC12-4		Ilco Dieless - IDT-6, IDT-6H, IDTB-6 IDTB-6-LIO, TB-6DF1000-P, IDT-12-N, IVTB-6
ST98046A			1/4	1	0.49	2.68	0.75	0.09	0.28								
ST98046B			3/8	1	0.57	2.68	0.75	0.07	0.38								
ST98046C			5/16	1	0.55	2.68	0.75	0.09	0.38								
ST98046D	3	25	1/4	5/8	0.55	2.24	0.83	0.09	0.28	WHITE	U2CRT	-	ILD -29	HT41AW	-		
ST98046E			1/4	1	0.50	2.80	0.83	0.09	0.28								
ST98046F			3/8	1	0.59	2.80	0.83	0.08	0.38								
ST98046G			5/16	3/4	0.55	2.60	0.83	0.09	0.32								
ST98047	2	35	5/16	3/4	0.60	2.60	0.83	0.10	0.32	BROWN	U2CRT	ILD - 7	ILD - 33	HT41AW	KC12-2	Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID	
ST98047A			1/4	5/8	0.60	2.24	0.83	0.10	0.28								
ST98047B			3/8	1	0.60	2.80	0.83	0.10	0.38								
ST98047C			1/4	3/4	0.60	2.36	0.83	0.10	0.28								
ST98047D			1/4	1	0.60	2.80	0.83	0.10	0.28								
ST98047E			1/2	1 3/4	0.60	3.98	0.83	0.10	0.62								
ST98048	1	50	1/4	5/8	0.67	2.28	0.83	0.11	0.28	GREEN	U1CRT U4CABT	ILD - 7	ILD - 37	HT41AX	KC12-1		
ST98048A			5/16	1	0.67	2.83	0.83	0.11	0.38								
ST98048B			3/8	1	0.67	2.83	0.83	0.11	0.38								

Copper, Two Hole, Standard Barrel Compression Lug, Slotted Tang

Catalog ID	Conductor		Stud Size	Hole Spacing	Tang Width	Dimensions In Inches				Color Code	• Installation Tooling					Dieless
	AWG	MM²				L	B	T	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilco ILC-12-N, ILC-12-H-N, ILCB-12	Huskie Model - EP-510C Die Index	Greenlee HK1240		
ST98049	1/0	-	5/16	7/8	0.74	2.64	0.83	0.13	0.32	PINK	U25RT U2CART	ILD - 8	ILD-42	HT41AY	KC12-1/0	Burndy Dieless - PAT444S & PAT4PC834LI.
ST98049A			1/4	3/4	0.74	2.40	0.83	0.13	0.28							
ST98050			3/8	1	0.74	2.83	0.83	0.13	0.38							
ST98050A			3/8	1 3/4	0.13	4.02	0.83	0.13	0.32							
ST98051	2/0	70	3/8	1	0.81	2.99	0.94	0.12	0.38	BLACK	U26RT	ILD - 10	ILD-45	HT41AZ	KC12-2/0	
ST98051A			1/4	3/4	0.81	2.56	0.94	0.12	0.28							
ST98051B			5/16	7/8	0.81	2.80	0.94	0.12	0.38							
ST98052			1/2	1 3/4	0.81	4.17	0.94	0.12	0.62							
ST98053	3/0	-	1/2	1 3/4	0.90	4.29	0.98	0.13	0.62	ORANGE	U27RT	ILD - 10	ILD-50	HT41BA	KC12-3/0	
ST98053A			3/8	1	0.90	3.11	0.98	0.13	0.38							
ST98053B			5/16	1	0.90	3.11	0.98	0.13	0.38							
ST98054			1/2	1 3/4	1.00	4.29	0.98	0.13	0.62							
ST98055	4/0	-	3/8	1	1.00	3.11	0.98	0.13	0.38	PURPLE	U28RT	ILD - 12	ILD-54	HT41BC	KC12-4/0	
ST98055B			5/16	5/8	1.00	2.56	0.98	0.13	0.28							
ST98055A			1/4	1	1.00	3.11	0.98	0.13	0.38							
ST98056			1/2	1 3/4	1.09	4.41	1.06	0.15	0.62							
ST98056A	250	-	3/8	1	1.09	3.23	1.06	0.15	0.38	YELLOW	U29RT	ILD - 13	ILD-62	HT41BE	KC12-250	
ST98056B			1/2	1 3/4	1.09	3.23	1.06	0.15	0.62							
ST98057	300	150	1/2	1 3/4	1.19	4.41	1.06	0.15	0.62	WHITE	U30RT U28ART	ILD - 14	ILD-66	HT41BE	KC12-300	
ST98058	350	185	1/2	1 3/4	1.28	4.53	1.10	0.17	0.62	RED	-	ILD - 14	ILD-71	HT41BJ	KC12-350	
ST98058A			3/8	1	1.28	3.35	1.10	0.17	0.38							
ST98059	400	-	1/2	1 3/4	1.39	4.69	1.18	0.18	0.62	BLUE	U32RT U30ART	ILD - 16	ILD-76	HT41BK	KC12-400	
ST98060	500	240	1/2	1 3/4	1.54	4.88	1.38	0.22	0.62	BROWN	U34RT U32ART	ILD - 16A	ILD-87	HT41BL	KC12-500	
ST98060A			3/8	1	1.54	3.70	1.38	0.22	0.38							
ST98061	600	300	3/8	1 3/4	1.72	5.04	1.50	0.25	0.62	GREEN	U36RT U32ART	ILD - 17	ILD-94	HT41HH / HT41BM	KC12-600	
ST98062			3/8	1 3/4	1.72	5.04	1.50	0.25	0.62							
ST98062A	700	-	5/8	1 3/4	1.78	5.51	1.85	0.27	0.62	PINK	-	-	-	-	-	
ST98062B			1/2	1 3/4	1.78	5.51	1.85	0.27	0.62							
ST98063	750	-	1/2	13/4	1.90	5.51	1.85	0.27	0.62	BLACK	U39RT	ILD - 18	ILD-106	HT41BP	KC12-750	
ST98063A			5/8	1 3/4	1.90	5.51	1.85	0.27	0.62							
ST98063B	1000	500	1/2	1 3/4	2.19	5.57	1.91	0.32	0.62	WHITE	-	-	-	-	-	
ST98063C			5/8	1 3/4	2.19	5.57	1.91	0.32	0.62							

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.

For Short Barrel Connectors, apply 1 crimp,
 For Long Barrel Connectors, apply 2 crimps on the color coded bands

NOTE: All Dimensions shows are for reference only.

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)