Catalog Id		Conductor			Stud Size	Dimensions									Color Code	Installation Tooling					Dieless
Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range		OD	L	B	A	W	T	∅F	E	C		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IIsco ILC-12-N, ILC-12-H-N, ILCB-12		Huskie Model - EP-510C Die Index	Greeniee HK1240	
98054NT	F98054NT	#4/0	#3/0	#4/0 - #1	1/2	0.68 [17.50]	4.29 [109.00]	0.98 [25.00]	2.99 [76.00]	0.68 [17.50]	0.13 [3.40]	0.51 [13.00]	0.62 [15.70]	1.75 [44.50]	Purple	U28RT	ILD-12	ILD - 54	HT41BC	KC12-4/0	Burndy Dieless - PAT444S & PAT4PC834LI. IIsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.
98055NT	F98055NT				3/8	0.68 [17.50]	3.11 [79.00]	0.98 [25.00]	1.81 [46.00]	0.68 [17.50]	0.13 [3.40]	0.41 [10.50]	0.38 [9.70]	1.00 [25.40]							
98055BNT	F98055BNT				1/4	0.68 [17.50]	2.56 [65.00]	0.98 [25.00]	1.26 [32.00]	0.68 [17.50]	0.13 [3.40]	0.25 [6.40]	0.28 [7.10]	0.62 [15.90]							
98055ANT	F98055ANT				5/16	0.68 [17.50]	3.11 [79.00]	0.98 [25.00]	1.81 [46.00]	0.68 [17.50]	0.13 [3.40]	0.33 [8.40]	0.38 [9.70]	1.00 [25.40]							

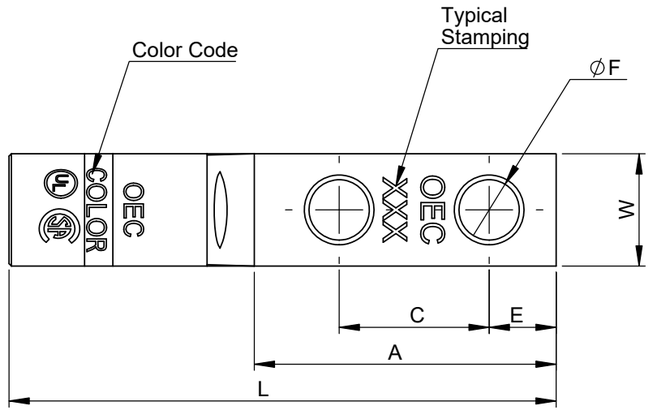

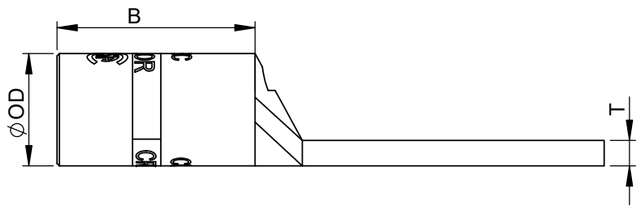

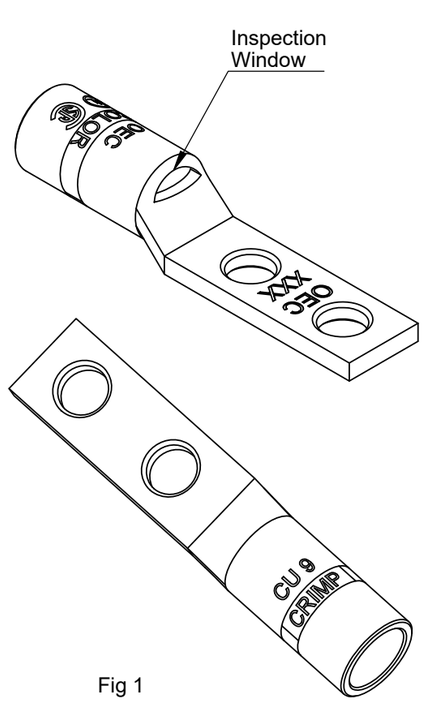

Fig 1

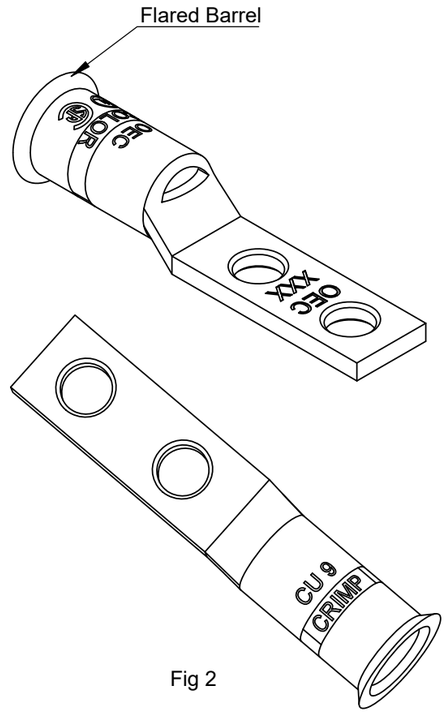

Fig 2

Note:
- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
  For Short Barrel Connectors, apply 1 crimp,
  For Long Barrel Connectors, apply 2 crimps on the color coded bands

TOLERANCE					
OD	L	B	A	W	∅F
±0.20	±1.0	±0.50	±0.50	±1.0	±0.20

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	28.02.25
CHECK	S.P.	28.02.25
APPROVED	M.K.	28.02.25

DWG. NO. OC-0005
PROJECTION: FIRST ANGLE
SIZE A3
MATERIAL Refer Note
FINISH Refer Note

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

TITLE: Copper Two Hole Standard Barrel Compression Lug Narrow Tang
Cat Id. 98054NT - 98055ANT | REV
DO NOT SCALE DRAWING | SHEET 8 OF 17

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT