


	8			7			6			5			4			3		2		1			
F	Catalog Id		Conductor				Dimensions							Installation Tooling									
	Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)		Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	Stud Size	OD	L	В	А	w	Т	ØF	E	С	Color Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IIsco ILC-12-N, ILC-12-H-N, ILCB-12	Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless	F	
	98060	F98060	500	350 (G,H,I,K,M) 500	500 - 250	1/2	1.06 [27.00]	4.88 [124.00]	1.38 [35.00]	2.99 [76.00]	1.54 [39.10]	0.22 [5.50]	0.51 [13.00]	0.62 [15.70]	1.75 [44.50]	Brown	U34RT U32ART	ILD-16A ILD - 87	HT41BL	KC12-500	Burndy Dieless - PAT444S & PAT4PC834LI. IIsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-6.		
	98060A	F98060A			373.7(DLO)	373.7(DLO)		3/8	1.06 [27.00]	3.70 [94.00]	1.38 [35.00]	1.81 [46.00]	1.54 [39.10]	0.22 [5.50]	4.13 [10.50]	0.38 [9.70]	1.00 [25.40]						Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.

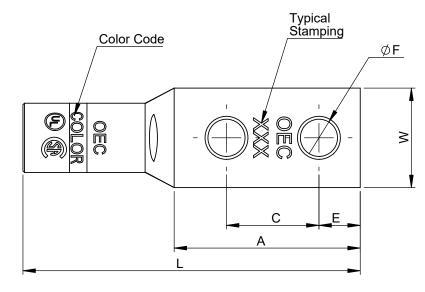

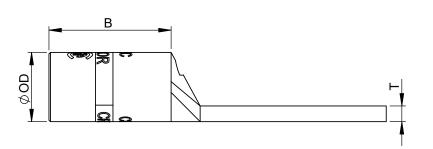

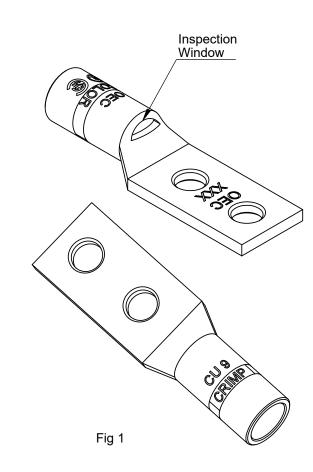

3

Note:

Ε

D

С

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
- For Short Barrel Connectors, apply 1 crimp,
- For Long Barrel Connectors, apply 2 crimps on the color coded bands


THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

8

4

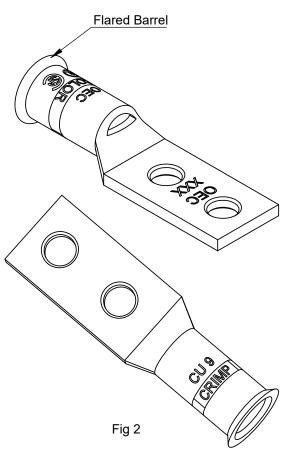

Ε

D

С

								В				
	TOLERANCE											
	OD	L		В	А	w	ØF					
	±0.20	±1.	.0	±0.50	±0.50	±1.0	±0.20					
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL_DEC. ±.015 TRUE C.L. ±.015 3 PL_DEC. ±.015 ANGLES ±.015	DRAWN F CHECK S APPROVED M	.P. 1.K.	DATE 28.02.25 28.02.25 28.02.25	– 106 Nc – Phone: +7								
DWG. NO. OC-0004 MATERIAL Refer Note			SIZE A3	TITLE: Co Ba	Α							
FINISH Refer Note	98060-980											
	2					1						