
	8   7			7			6			5					4   3					
	Catalog Id		Conductor				Dimensions								Installation Tooling					
F	Without Inspection Window (Fig-1)	With Inspection Window (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	Stud Size	OD	L	в	А	w	т	ØF	E	Color Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IIsco IL ILC-12-H·	.C-12-N, N, ILCB-12	Huskie Model - EP-510C Die Index	Greenie
	98064	P98064				1/4	0.27 [6.90]	1.51 [38.50]	0.80 [20.50]	0.59 [15.00]	0.42 [10.70]	0.08 [2.00]	0.28 [7.13]	0.27 [7.00]						
	98064A	P98064A	#8	#8	-	#10	0.27 [6.90]	1.51 [38.50]	0.80 [20.50]	0.59 [15.00]	0.42 [10.70]	0.08 [2.00]	0.21 [5.56]	0.27 [7.00]	Red	U8CTR	ILD - 2	ILD - 21	NA	ко
_	98064B	P98064B				3/8	0.27 [6.90]	1.60 [40.50]	0.80 [20.50]	0.66 [17.00]	0.57 [14.50]	0.04 [1.20]	0.41 [10.41]	0.31 [8.00]						

## Typical ØF Stamping Color Code $\geq$

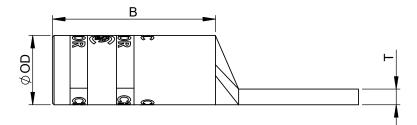

## Note:

8

F

D

С

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

## Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel
- of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
- For Short Barrel Connectors, apply 1 crimp,
- For Long Barrel Connectors, apply 2 crimps on the color coded bands

## THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5



4

SILGINED									
2 PL. DEC. ±.015									
3 PL. DEC. ±.01	5 ANGLES								
DWG. NO.									
OC-000									
MATERIAL	Refer								
	D - 6								
FINISH	Refer								

3

