
8			7			6 5			4			3			2		1						
	Catalog Id		Conductor		Obud Oine	Dimensions								Installation Tooling				Distant					
F	Without nspection Window (Fig-1)	With Inspection Window (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	- Stud Size	OD	L	В	A	w	Т	ØF	E	Color Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	ILC-12-⊢	C-12-N, I-N, ILCB- 12	Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless	F	
	98074NT	P98074NT	250) #4/0	250 - #1/0	1/2	0.75 [19.10]	3.03 [77.00]	1.59 [40.50]	1.06 [27.00]	0.75 [19.10]	0.15 [3.80]	0.56 [14.22]	0.52 [13.20]	Yellow	U29RT	ILD-13	ILD - 62	HT41BE	KC12-250	Burndy Dieless - PAT444S & PAT4PC834L IIsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-6.		
	98074ANT	P98074ANT				3/8	3/8	0.75 [19.10]	3.03 [77.00]	1.59 [40.50]	1.06 [27.00]	0.75 [19.10]	0.15] [3.80]	0.41 [10.41]	0.52 [13.20]							Greenlee & NSI Dieless - HK12ID, EK12ID N12ID.	-,
E	Color Code Vindow												E										


D

С

В

Α

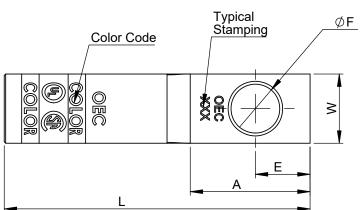

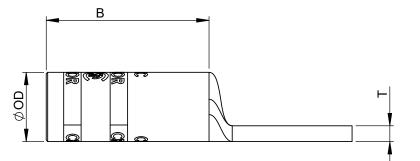

Note:

8

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

• Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.

For Short Barrel Connectors, apply 1 crimp,

For Long Barrel Connectors, apply 2 crimps on the color coded bands

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

Fig-1

4

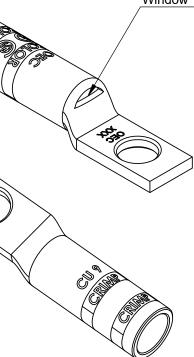


Fig-2

3

	TOLERANCE												
	OD		L ±1.0		В	А	w	ØF					
	±0.20	±			±0.50	±0.50	±1.0	±0.20					
TOLERANCES-UNLESS OTHERWISE SPECIFIED		NAME	DA				^	lia a					
2 PL. DEC. ±.015 TRUE C.L. ±.015	DRAWN	R.P S.P.	03.03.			OEC Usa Inc.							
3 PL. DEC. ±.015 ANGLES ±.015	APPROVED	DVED MK 03.03.25				106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com							
	PROJECTION:	FIRST ANG	-		FIIONE. +	1 / 32-4 / 7-0407							
DWG. NO. OC-0010			SIZ		TITLE:	~							
MATERIAL Refer Note	2				Narrow Tang								
FINISH Refer Note	9				Cat Id.								
					DO NOT	SCALE DRAN	wing sf	IEET 9 OF 17	ļ				
	2						1						

D

С