

	8		7			6		5			4			3			2		1	_				
	Catalog Id		Conductor				Dimensions							Color	Installation Tooling									
F	Without Inspection Window (Fig-1)	With Inspection Window (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO		Stud Size	OD	L	В	A	w	т	ØF	E	Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	750, PAT750, 10 0 10 10 10		Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless	F		
	98076	P98076	350	250 (G,H,I,K,M) 262(DLO)	(G,H,I,K,M)	(G,H,I,K,M)	350 - #3/0	1/2	0.87 [22.20]	3.46 [88.00]	1.97 [50.00]	1.06 [27.00]	1.27 [32.40]	0.17 [4.20]	0.56 [14.22]	0.52 [13.20]	Red	-	ILD-14	ILD - 71	- 71 HT41BJ	KC12-350	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO,	
	98076A	P98076A				5/8	0.87 [22.20]	3.46 [88.00]	1.97 [50.00]	1.40 [35.50]	1.27 [32.40]	0.17 [4.20]	0.65 [16.51]	0.51 [13.20]							TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.	3-6.		



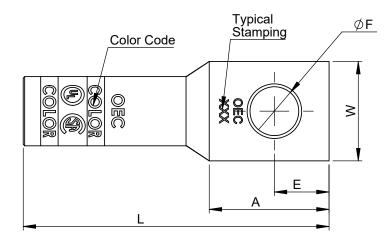

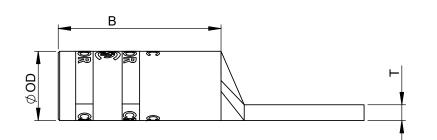

8

Ε

D

С

В

А

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable


Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
- For Short Barrel Connectors, apply 1 crimp,
- For Long Barrel Connectors, apply 2 crimps on the color coded bands



6

5

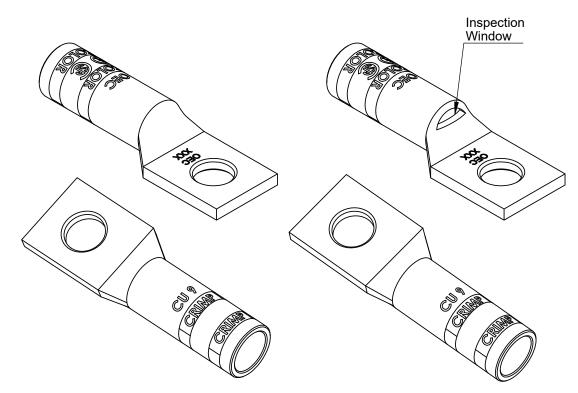


Fig-1

4

SPECIFIED	
2 PL. DEC. ±.015	
3 PL. DEC. ±.01	5 ANGLE
DWG. I	
	C-000
MATERIAL	Refer
FINISH	Refer

3

TOLERANCES-UNLESS OTH

Fig-2

	TOLERANCE												
	OD		L			В	А	W	ØF				
	±0.20		±1.0		±0.50		±0.50	±1.0	±0.20				
HERWISE 5 C.L. ±.015 GLES ±.015	NAME DATE DRAWN R.P 03.03.25 CHECK S.P. 03.03.25 APPROVED M.K. 03.03.25					106 Nc							
09 er Note		FIRST	T ANGLE →	SIZ A:			opper On rrel Comp			Α			
er Note	:					Cat Id. 98076 - 98076A REV DO NOT SCALE DRAWING SHEET 13 OF 19							
	2							1					

Ε

D

С