


	8			7		6			5		4			3			2		1									
	Catalog Id		Conductor				Dimensions						Color	Installation Tooling														
F	Without Inspection Window (Fig-1)	With Inspection Window (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod Range	Stud Size	OD	L	В	A	w	т	ØF	E	Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IIsco ILC ILC-12-H-N	- I Z-IN.	Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless							
	98076NT	P98076NT	350	250 (G,H,I,K,M) 350 262(DLO)								350 - #3/0	1/2	0.87 [22.20]	3.46 [88.00]	1.97 [50.00]	1.06 [27.00]	0.87 [22.20]	0.17 [4.20]	0.56 [14.22]	0.52 [13.20]	Red	-	ILD-14	ILD - 71	HT41BJ	KC12-350	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO,
	98076ANT	P98076ANT				5/8	0.87 [22.20]	3.46 [88.00]	1.97 [50.00]	1.40 [35.50]	0.87 [22.20]	0.17 [4.20]	0.65 [16.51]	0.51 [13.20]							TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.							

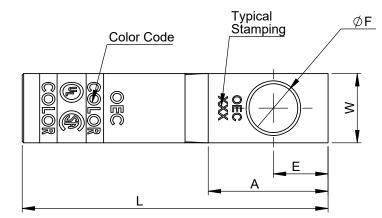

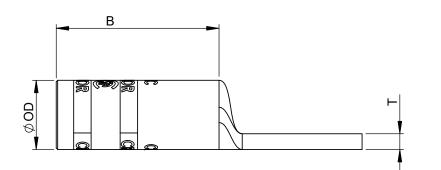

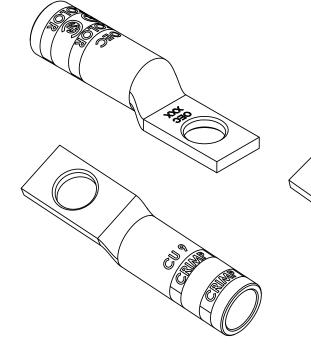

## Note:

8

Ε

D

С

\_\_\_\_

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

## Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
- For Short Barrel Connectors, apply 1 crimp,
- For Long Barrel Connectors, apply 2 crimps on the color coded bands


THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

Fig-1

4

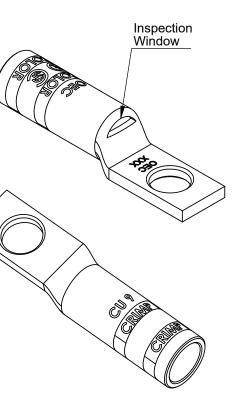

Ε

D

С

Fig-2

3

	r											
		TOLERANCE										
	OD	L	-	В	A	w	ØF					
	±0.20	±1	.0	±0.50	±0.50	±1.0	±0.20					
TOLERANCES-UNLESS OTHERWISE SPECIFED 2 PL DEC. ± 015 TRUE C.L. ± 015 3 PL DEC. ± 015 ANGLES ± 015	DRAWN CHECK APPROVED	NAME R.P S.P. M.K.	DATE 03.03.25 03.03.25 03.03.25	5 5 106 No	DEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com							
DWG. NO. OC-0010 MATERIAL Refer Note			SIZE A3	E	TITLE: Copper One Hole Long Barrel Compression Lug Narrow Tang							
FINISH Refer Note					Cat Id. 98076NT - 98076ANT REV							
	2					1						