


8			7		6			5			4			3			2		1			
Catalog Id		Conductor			Stud	Dimensions								Color	Installation Tooling				Distant			
Without Flared Barrel (Fig 1)	Flared	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	Size	OD	L	В	A	w	Т	ØF	E	С	<u> </u>	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	IIsco ILC ILC-12- ILCB-	-12-in, -H-N,	Huskie Model - EP-510C Die Index	Greeniee	Dieless ee 40	
BA98058	8 FBA98058	- 350	250 (G,H,I,K,M)	350 - #3/0	1/2	0.87 [22.20]	4.53 [115.00]	1.10 [28.00]	2.99 [76.00]	1.27 [32.40]	0.16 [4.20]	0.51 [13.00]	0.62 [15.70]	1.75 [44.50]	Red	-	ILD-14	ILD - 71	HT41BJ	KC12-350	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO,	
BA98058A	BA FBA98058A		262.6(DLO)		3/8	0.87 [22.20]	3.35 [85.00]	1.10 [28.00]	1.81 [46.00]	1.27 [32.40]	0.16 [4.20]	0.41 [10.50]	0.38 [9.70]	1.00 [25.40]	ĸea						TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID	
BA98058A					3/8	[22.20]	[85.00]	[28.00]		[32.40]	[4.20]	[10.50]	[9.70]	[25.40]							Greenlee & NSI Diel	ess - HK12ID, EK12IDL, N12ID

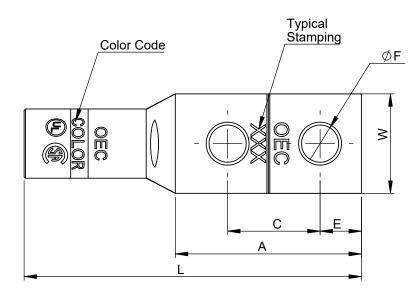

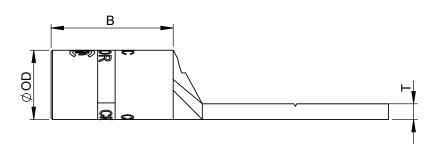

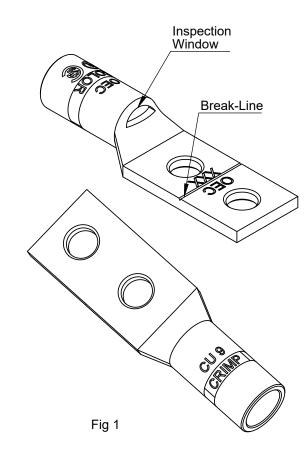

3

## Note:

Ε

D

С

\_\_\_\_

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

## Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

• Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.

For Short Barrel Connectors, apply 1 crimp,

For Long Barrel Connectors, apply 2 crimps on the color coded bands


THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

8

4

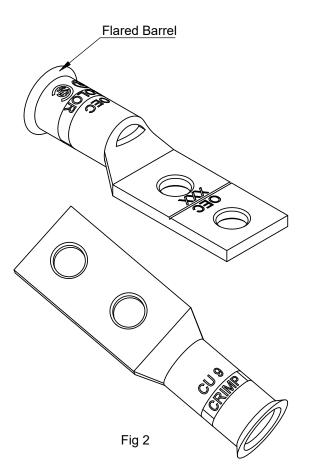

Е

D

С

	TOLERANCE										
	OD	L		В	А	W	ØF				
	±0.20	±1.	0	±0.50	±0.50	±1.0	±0.20				
TOLERANCES-UNLESS OTHERWISE SPECIFED 2 PL DEC. ±.015 TRUE C.L. ±.015 3 PL DEC. ±.015 ANGLES ±.015	DRAWN F CHECK S APPROVED M	DATE 01.03.25 01.03.25 01.03.25	1	DEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com							
DWG. NO. OC-0007 MATERIAL Refer Note			SIZE A3	TITLE: Copper Two Hole Standard Barrel Compression Lug Break-Away							
FINISH Refer Note	:			Cat ld. DO NOT							
	2					1		•			