

Bus Bar Assembly Pattern "CC"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material


- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

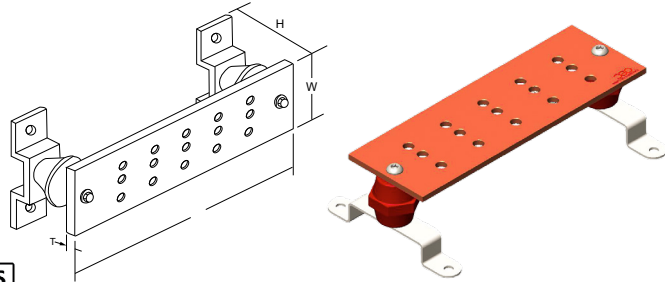

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-C-0120314-U	OEC-CBB-C-0120314-T	12"	3"	1/4"	0.438"	15
OEC-CBB-C-0160314-U	OEC-CBB-C-0160314-T	16"	3"	1/4"	0.438"	21
OEC-CBB-C-0200314-U	OEC-CBB-C-0200314-T	20"	3"	1/4"	0.438"	27
OEC-CBB-C-0240314-U	OEC-CBB-C-0240314-T	24"	3"	1/4"	0.438"	33
OEC-CBB-C-0300314-U	OEC-CBB-C-0300314-T	30"	3"	1/4"	0.438"	44
OEC-CBB-C-0360314-U	OEC-CBB-C-0360314-T	36"	3"	1/4"	0.438"	51
OEC-CBB-C-0480314-U	OEC-CBB-C-0480314-T	48"	3"	1/4"	0.438"	69
OEC-CBB-C-0120312-U	OEC-CBB-C-0120312-T	12"	3"	1/2"	0.438"	15
OEC-CBB-C-0060414-U	OEC-CBB-C-0060414-T	6"	4"	1/4"	0.438"	6
OEC-CBB-C-0100414-U	OEC-CBB-C-0100414-T	10"	4"	1/4"	0.438"	12
OEC-CBB-C-1200414-U	OEC-CBB-C-1200414-T	120"	4"	1/4"	0.438"	177
OEC-CBB-C-0120414-U	OEC-CBB-C-0120414-T	12"	4"	1/4"	0.438"	15
OEC-CBB-C-0140414-U	OEC-CBB-C-0140414-T	14"	4"	1/4"	0.438"	18
OEC-CBB-C-0160414-U	OEC-CBB-C-0160414-T	16"	4"	1/4"	0.438"	21
OEC-CBB-C-0180414-U	OEC-CBB-C-0180414-T	18"	4"	1/4"	0.438"	24
OEC-CBB-C-0240414-U	OEC-CBB-C-0240414-T	24"	4"	1/4"	0.438"	33
OEC-CBB-C-0280414-U	OEC-CBB-C-0280414-T	28"	4"	1/4"	0.438"	39
OEC-CBB-C-0300414-U	OEC-CBB-C-0300414-T	30"	4"	1/4"	0.438"	42
OEC-CBB-C-0320414-U	OEC-CBB-C-0320414-T	32"	4"	1/4"	0.438"	45
OEC-CBB-C-0360414-U	OEC-CBB-C-0360414-T	36"	4"	1/4"	0.438"	51
OEC-CBB-C-0400414-U	OEC-CBB-C-0400414-T	40"	4"	1/4"	0.438"	57
OEC-CBB-C-0420414-U	OEC-CBB-C-0420414-T	42"	4"	1/4"	0.438"	60
OEC-CBB-C-0480414-U	OEC-CBB-C-0480414-T	48"	4"	1/4"	0.438"	69
OEC-CBB-C-0600414-U	OEC-CBB-C-0600414-T	60"	4"	1/4"	0.438"	87
OEC-CBB-C-0720414-U	OEC-CBB-C-0720414-T	72"	4"	1/4"	0.438"	105
OEC-CBB-C-0960414-U	OEC-CBB-C-0960414-T	96"	4"	1/4"	0.438"	141
OEC-CBB-C-0200414-U	OEC-CBB-C-0200414-T	20"	4"	1/4"	0.438"	27
OEC-CBB-C-0120438-U	OEC-CBB-C-0120438-T	12"	4"	3/8"	0.438"	15
OEC-CBB-C-0200438-U	OEC-CBB-C-0200438-T	20"	4"	3/8"	0.438"	27
OEC-CBB-C-0240438-U	OEC-CBB-C-0240438-T	24"	4"	3/8"	0.438"	33
OEC-CBB-C-0480438-U	OEC-CBB-C-0480438-T	48"	4"	3/8"	0.438"	39
OEC-CBB-C-0120412-U	OEC-CBB-C-0120412-T	12"	4"	1/2"	0.438"	15
OEC-CBB-C-0240412-U	OEC-CBB-C-0240412-T	24"	4"	1/2"	0.438"	33
OEC-CBB-C-0120614-U	OEC-CBB-C-0120614-T	12"	6"	1/4"	0.438"	15
OEC-CBB-C-0180614-U	OEC-CBB-C-0180614-T	18"	6"	1/4"	0.438"	24
OEC-CBB-C-0200614-U	OEC-CBB-C-0200614-T	20"	6"	1/4"	0.438"	27
OEC-CBB-C-0240614-U	OEC-CBB-C-0240614-T	24"	6"	1/4"	0.438"	33
OEC-CBB-C-0300614-U	OEC-CBB-C-0300614-T	30"	6"	1/4"	0.438"	42
OEC-CBB-C-0360614-U	OEC-CBB-C-0360614-T	36"	6"	1/4"	0.438"	51
OEC-CBB-C-0240638-U	OEC-CBB-C-0240638-T	24"	6"	3/8"	0.438"	33
OEC-CBB-C-0240612-U	OEC-CBB-C-0240612-T	24"	6"	1/2"	0.438"	33
OEC-CBB-C-0360814-U	OEC-CBB-C-0360814-T	36"	8"	1/4"	0.438"	51

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)