

Bus Bar Assembly Pattern "DD"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material


- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

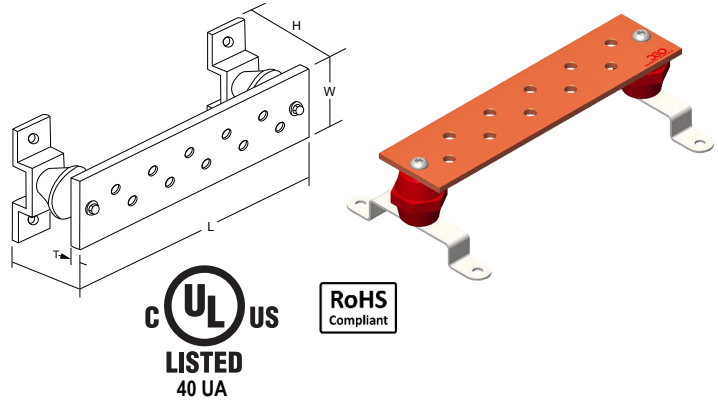

Catalog ID		L	W	T	Mounting Hole
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating				
OEC-CBB-D-0120214-U	OEC-CBB-D-0120214-T	12"	2"	1/4"	0.438"
OEC-CBB-D-0240214-U	OEC-CBB-D-0240214-T	24"	2"	1/4"	0.438"
OEC-CBB-D-0300214-U	OEC-CBB-D-0300214-T	30"	2"	1/4"	0.438"
OEC-CBB-D-0360214-U	OEC-CBB-D-0360214-T	36"	2"	1/4"	0.438"
OEC-CBB-D-0480214-U	OEC-CBB-D-0480214-T	48"	2"	1/4"	0.438"
OEC-CBB-D-0180214-U	OEC-CBB-D-0180214-T	18"	2"	1/4"	0.438"
OEC-CBB-D-0120314-U	OEC-CBB-D-0120314-T	12"	3"	1/4"	0.438"
OEC-CBB-D-0120338-U	OEC-CBB-D-0120338-T	12"	3"	3/8"	0.438"
OEC-CBB-D-0120414-U	OEC-CBB-D-0120414-T	12"	4"	1/4"	0.438"
OEC-CBB-D-0160414-U	OEC-CBB-D-0160414-T	16"	4"	1/4"	0.438"
OEC-CBB-D-0200414-U	OEC-CBB-D-0200414-T	20"	4"	1/4"	0.438"
OEC-CBB-D-0240414-U	OEC-CBB-D-0240414-T	24"	4"	1/4"	0.438"
OEC-CBB-D-0360414-U	OEC-CBB-D-0360414-T	36"	4"	1/4"	0.438"
OEC-CBB-D-0200614-U	OEC-CBB-D-0200614-T	20"	6"	1/4"	0.438"

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)