

Bus Bar Assembly Pattern "EE"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material



- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

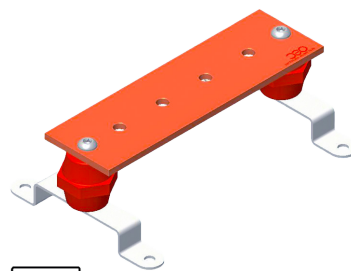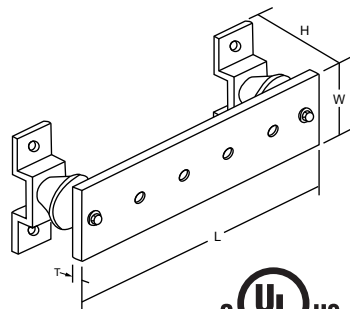

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-E-0120114-U	OEC-CBB-E-0120114-T	12"	1"	1/4"	0.438"	5
OEC-CBB-E-0240114-U	OEC-CBB-E-0240114-T	24"	1"	1/4"	0.438"	11
OEC-CBB-E-0480114-U	OEC-CBB-E-0480114-T	48"	1"	1/4"	0.438"	23
OEC-CBB-E-0100138-U	OEC-CBB-E-0100138-T	10"	1"	3/8"	0.438"	4
OEC-CBB-E-0060214-U	OEC-CBB-E-0060214-T	6"	2"	1/4"	0.438"	2
OEC-CBB-E-0080214-U	OEC-CBB-E-0080214-T	8"	2"	1/4"	0.438"	3
OEC-CBB-E-0100214-U	OEC-CBB-E-0100214-T	10"	2"	1/4"	0.438"	4
OEC-CBB-E-0120214-U	OEC-CBB-E-0120214-T	12"	2"	1/4"	0.438"	5
OEC-CBB-E-0160214-U	OEC-CBB-E-0160214-T	16"	2"	1/4"	0.438"	7
OEC-CBB-E-0180214-U	OEC-CBB-E-0180214-T	18"	2"	1/4"	0.438"	8
OEC-CBB-E-0200214-U	OEC-CBB-E-0200214-T	20"	2"	1/4"	0.438"	9
OEC-CBB-E-0220214-U	OEC-CBB-E-0220214-T	22"	2"	1/4"	0.438"	10
OEC-CBB-E-0240214-U	OEC-CBB-E-0240214-T	24"	2"	1/4"	0.438"	11
OEC-CBB-E-0300214-U	OEC-CBB-E-0300214-T	30"	2"	1/4"	0.438"	14
OEC-CBB-E-0360214-U	OEC-CBB-E-0360214-T	36"	2"	1/4"	0.438"	17
OEC-CBB-E-0400214-U	OEC-CBB-E-0400214-T	40"	2"	1/4"	0.438"	19
OEC-CBB-E-0480214-U	OEC-CBB-E-0480214-T	48"	2"	1/4"	0.438"	23
OEC-CBB-E-0720214-U	OEC-CBB-E-0720214-T	72"	2"	1/4"	0.438"	35
OEC-CBB-E-0960214-U	OEC-CBB-E-0960214-T	96"	2"	1/4"	0.438"	47
OEC-CBB-E-0120238-U	OEC-CBB-E-0120238-T	12"	2"	3/8"	0.438"	5
OEC-CBB-E-0480238-U	OEC-CBB-E-0480238-T	48"	2"	3/8"	0.438"	23
OEC-CBB-E-0720238-U	OEC-CBB-E-0720238-T	72"	2"	3/8"	0.438"	35
OEC-CBB-E-0960238-U	OEC-CBB-E-0960238-T	96"	2"	3/8"	0.438"	47
OEC-CBB-E-0080314-U	OEC-CBB-E-0080314-T	8"	3"	1/4"	0.438"	3
OEC-CBB-E-0120314-U	OEC-CBB-E-0120314-T	12"	3"	1/4"	0.438"	5
OEC-CBB-E-0320338-U	OEC-CBB-E-0320338-T	32"	3"	3/8"	0.438"	15
OEC-CBB-E-0100414-U	OEC-CBB-E-0100414-T	10"	4"	1/4"	0.438"	4
OEC-CBB-E-0120414-U	OEC-CBB-E-0120414-T	12"	4"	1/4"	0.438"	5
OEC-CBB-E-0140414-U	OEC-CBB-E-0140414-T	14"	4"	1/4"	0.438"	6
OEC-CBB-E-0200414-U	OEC-CBB-E-0200414-T	20"	4"	1/4"	0.438"	9
OEC-CBB-E-0240414-U	OEC-CBB-E-0240414-T	24"	4"	1/4"	0.438"	11
OEC-CBB-E-0300414-U	OEC-CBB-E-0300414-T	30"	4"	1/4"	0.438"	14
OEC-CBB-E-0360414-U	OEC-CBB-E-0360414-T	36"	4"	1/4"	0.438"	17
OEC-CBB-E-0960414-U	OEC-CBB-E-0960414-T	96"	4"	1/4"	0.438"	47
OEC-CBB-E-0360438-U	OEC-CBB-E-0360438-T	36"	4"	3/8"	0.438"	17
OEC-CBB-E-0080438-U	OEC-CBB-E-0080438-T	8"	4"	3/8"	0.438"	3
OEC-CBB-E-0180412-U	OEC-CBB-E-0180412-T	18"	4"	1/2"	0.438"	8
OEC-CBB-E-0200838-U	OEC-CBB-E-0200838-T	20"	8"	3/8"	0.438"	9

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)