

## Bus Bar Assembly Pattern "FF"

### Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

### Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

### Standard Material


- Copper

### Standard Finish

- Natural / Tin plated

### Certification

- cULus Listed UL467 (E178441)

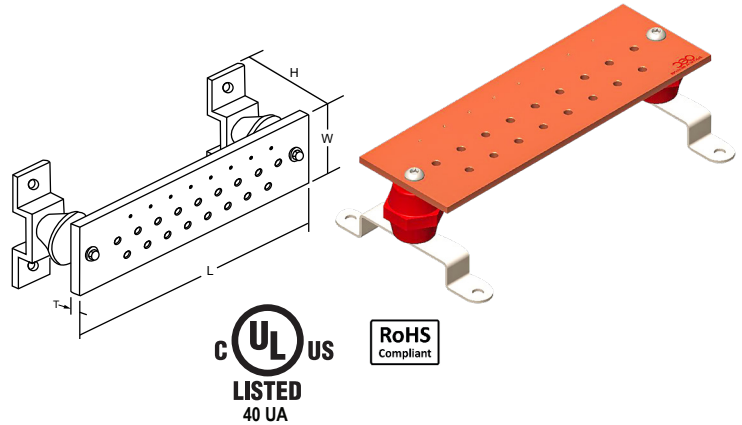

| Catalog ID                           |                                   | L   | W  | T    | Mounting Hole | Mounting Number of Point | Number of Tapped Hole |
|--------------------------------------|-----------------------------------|-----|----|------|---------------|--------------------------|-----------------------|
| Bus Bar Assembly without Tin Plating | Bus Bar Assembly with Tin Plating |     |    |      |               |                          |                       |
| OEC-CBB-F-0060414-U                  | OEC-CBB-F-0060414-T               | 6"  | 4" | 1/4" | 0.438"        | 7                        | 3                     |
| OEC-CBB-F-0100414-U                  | OEC-CBB-F-0100414-T               | 10" | 4" | 1/4" | 0.438"        | 13                       | 6                     |
| OEC-CBB-F-0120414-U                  | OEC-CBB-F-0120414-T               | 12" | 4" | 1/4" | 0.438"        | 17                       | 8                     |
| OEC-CBB-F-0180414-U                  | OEC-CBB-F-0180414-T               | 18" | 4" | 1/4" | 0.438"        | 27                       | 13                    |
| OEC-CBB-F-0200414-U                  | OEC-CBB-F-0200414-T               | 20" | 4" | 1/4" | 0.438"        | 31                       | 15                    |
| OEC-CBB-F-0240414-U                  | OEC-CBB-F-0240414-T               | 24" | 4" | 1/4" | 0.438"        | 37                       | 18                    |
| OEC-CBB-F-0480414-U                  | OEC-CBB-F-0480414-T               | 48" | 4" | 1/4" | 0.438"        | 79                       | 39                    |
| OEC-CBB-F-0120614-U                  | OEC-CBB-F-0120614-T               | 12" | 6" | 1/4" | 0.438"        | 17                       | 8                     |

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)