

Bus Bar Assembly Pattern "HH"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material


- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

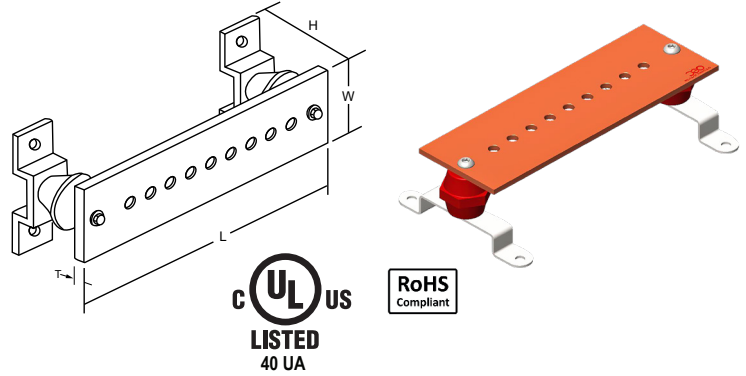

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-H-0060114-U	OEC-CBB-H-0060114-T	6"	1"	1/4"	0.438"	3
OEC-CBB-H-0120114-U	OEC-CBB-H-0120114-T	12"	1"	1/4"	0.438"	9
OEC-CBB-H-0160114-U	OEC-CBB-H-0160114-T	16"	1"	1/4"	0.438"	13
OEC-CBB-H-0220114-U	OEC-CBB-H-0220114-T	22"	1"	1/4"	0.438"	19
OEC-CBB-H-0080214-U	OEC-CBB-H-0080214-T	8"	2"	1/4"	0.438"	5
OEC-CBB-H-0120214-U	OEC-CBB-H-0120214-T	12"	2"	1/4"	0.438"	9
OEC-CBB-H-0140214-U	OEC-CBB-H-0140214-T	14"	2"	1/4"	0.438"	11
OEC-CBB-H-0160214-U	OEC-CBB-H-0160214-T	16"	2"	1/4"	0.438"	13
OEC-CBB-H-0180214-U	OEC-CBB-H-0180214-T	18"	2"	1/4"	0.438"	15
OEC-CBB-H-0200214-U	OEC-CBB-H-0200214-T	20"	2"	1/4"	0.438"	17
OEC-CBB-H-0240214-U	OEC-CBB-H-0240214-T	24"	2"	1/4"	0.438"	21
OEC-CBB-H-0300214-U	OEC-CBB-H-0300214-T	30"	2"	1/4"	0.438"	27
OEC-CBB-H-0180212-U	OEC-CBB-H-0180212-T	18"	2"	1/2"	0.438"	15
OEC-CBB-H-0120314-U	OEC-CBB-H-0120314-T	12"	3"	1/4"	0.438"	9
OEC-CBB-H-0600314-U	OEC-CBB-H-0600314-T	60"	3"	1/4"	0.438"	57
OEC-CBB-H-0120414-U	OEC-CBB-H-0120414-T	12"	4"	1/4"	0.438"	9
OEC-CBB-H-0160414-U	OEC-CBB-H-0160414-T	16"	4"	1/4"	0.438"	13
OEC-CBB-H-0200414-U	OEC-CBB-H-0200414-T	20"	4"	1/4"	0.438"	17
OEC-CBB-H-0120438-U	OEC-CBB-H-0120438-T	12"	4"	3/8"	0.438"	9
OEC-CBB-H-0160438-U	OEC-CBB-H-0160438-T	16"	4"	3/8"	0.438"	13

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)