

Bus Bar Assembly Pattern "MM"


Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material **Standard Finish** **Certification**
 • Copper • Natural / Tin plated • cULus Listed UL467 (E178441)

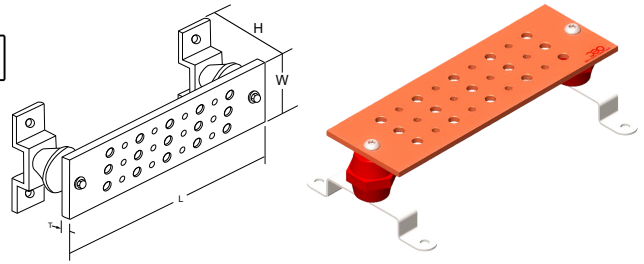

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-M-0240314-U	OEC-CBB-M-0240314-T	24"	3"	1/4"	0.438"	63
OEC-CBB-M-0080314-U	OEC-CBB-M-0080314-T	8"	3"	1/4"	0.438"	15
OEC-CBB-M-0120314-U	OEC-CBB-M-0120314-T	12"	3"	1/4"	0.438"	27
OEC-CBB-M-0080414-U	OEC-CBB-M-0080414-T	8"	4"	1/4"	0.438"	15
OEC-CBB-M-0120414-U	OEC-CBB-M-0120414-T	12"	4"	1/4"	0.438"	27
OEC-CBB-M-0160414-U	OEC-CBB-M-0160414-T	16"	4"	1/4"	0.438"	39
OEC-CBB-M-0180414-U	OEC-CBB-M-0180414-T	18"	4"	1/4"	0.438"	45
OEC-CBB-M-0200414-U	OEC-CBB-M-0200414-T	20"	4"	1/4"	0.438"	51
OEC-CBB-M-0240414-U	OEC-CBB-M-0240414-T	24"	4"	1/4"	0.438"	63
OEC-CBB-M-0360412-U	OEC-CBB-M-0360412-T	36"	4"	1/2"	0.438"	99
OEC-CBB-M-0480414-U	OEC-CBB-M-0480414-T	48"	4"	1/4"	0.438"	135
OEC-CBB-M-0180412-U	OEC-CBB-M-0180412-T	18"	4"	1/2"	0.438"	45
OEC-CBB-M-0180614-U	OEC-CBB-M-0180614-T	18"	6"	1/4"	0.438"	45
OEC-CBB-M-0480612-U	OEC-CBB-M-0480612-T	48"	6"	1/2"	0.438"	135
OEC-CBB-M-0240814-U	OEC-CBB-M-0240814-T	24"	8"	1/4"	0.438"	63

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)