


Bus Bar Assembly Pattern "LL"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

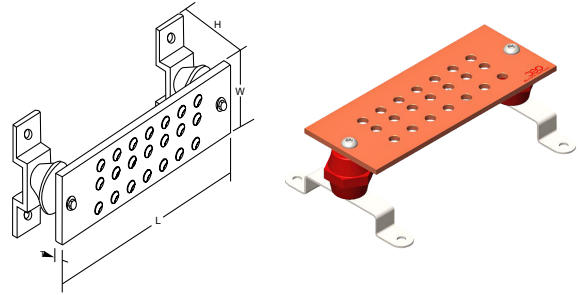

Standard Material	Standard Finish	Certification
• Copper	• Natural / Tin plated	• cULus Listed UL467 (E178441)

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-L-0120314-U	OEC-CBB-L-0120314-T	12"	3"	1/4"	0.438"	27
OEC-CBB-L-0240314-U	OEC-CBB-L-0240314-T	24"	3"	1/4"	0.438"	63
OEC-CBB-L-0060414-U	OEC-CBB-L-0060414-T	6"	4"	1/4"	0.438"	9
OEC-CBB-L-0100414-U	OEC-CBB-L-0100414-T	10"	4"	1/4"	0.438"	21
OEC-CBB-L-0120414-U	OEC-CBB-L-0120414-T	12"	4"	1/4"	0.438"	27
OEC-CBB-L-0140414-U	OEC-CBB-L-0140414-T	14"	4"	1/4"	0.438"	33
OEC-CBB-L-0160414-U	OEC-CBB-L-0160414-T	16"	4"	1/4"	0.438"	39
OEC-CBB-L-0180414-U	OEC-CBB-L-0180414-T	18"	4"	1/4"	0.438"	57
OEC-CBB-L-0200414-U	OEC-CBB-L-0200414-T	20"	4"	1/4"	0.438"	51
OEC-CBB-L-0240414-U	OEC-CBB-L-0240414-T	24"	4"	1/4"	0.438"	63
OEC-CBB-L-0300414-U	OEC-CBB-L-0300414-T	30"	4"	1/4"	0.438"	81
OEC-CBB-L-0360414-U	OEC-CBB-L-0360414-T	36"	4"	1/4"	0.438"	99
OEC-CBB-L-0400414-U	OEC-CBB-L-0400414-T	40"	4"	1/4"	0.438"	111
OEC-CBB-L-0480414-U	OEC-CBB-L-0480414-T	48"	4"	1/4"	0.438"	147
OEC-CBB-L-0960414-U	OEC-CBB-L-0960414-T	96"	4"	1/4"	0.438"	279
OEC-CBB-L-0240614-U	OEC-CBB-L-0240614-T	24"	6"	1/4"	0.438"	63
OEC-CBB-L-0240814-U	OEC-CBB-L-0240814-T	24"	8"	1/4"	0.438"	63

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)