

Bus Bar Assembly Pattern "RR"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material



- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

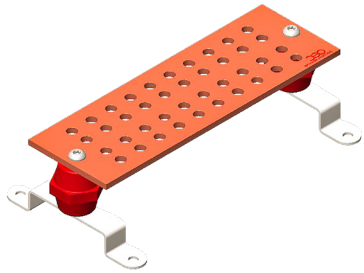

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-R-0120414-U	OEC-CBB-R-0120414-T	12"	4"	1/4"	0.438"	36
OEC-CBB-R-0180414-U	OEC-CBB-R-0180414-T	18"	4"	1/4"	0.438"	64
OEC-CBB-R-0200414-U	OEC-CBB-R-0200414-T	20"	4"	1/4"	0.438"	68
OEC-CBB-R-0240414-U	OEC-CBB-R-0240414-T	24"	4"	1/4"	0.438"	84
OEC-CBB-R-0090614-U	OEC-CBB-R-0090614-T	9"	6"	1/4"	0.438"	24
OEC-CBB-R-0180614-U	OEC-CBB-R-0180614-T	18"	6"	1/4"	0.438"	60
OEC-CBB-R-0240614-U	OEC-CBB-R-0240614-T	24"	6"	1/4"	0.438"	84
OEC-CBB-R-0300614-U	OEC-CBB-R-0300614-T	30"	6"	1/4"	0.438"	108

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)