

F

E

D

C

B

A

F

E





D

C

B

A

Sr.No	Catalog ID	Conductor Range	Stud Hole	Strip Length	Allen Hex Wrench Style	Screw Material	Torque In (lbs)	MARKING
1	50043A	3/0-6 Str (CU)	5/16	1.00	Allen Hex	Steel Blue Zinc Plated	200	OEC, 50043A, 3/0-6, AL9CU, cULus, CSA
2	50043AS	3/0-6 Str (AL)				Stainless Steel-SS304	200	OEC, 50043AS, 3/0-6, AL9CU, cULus, CSA

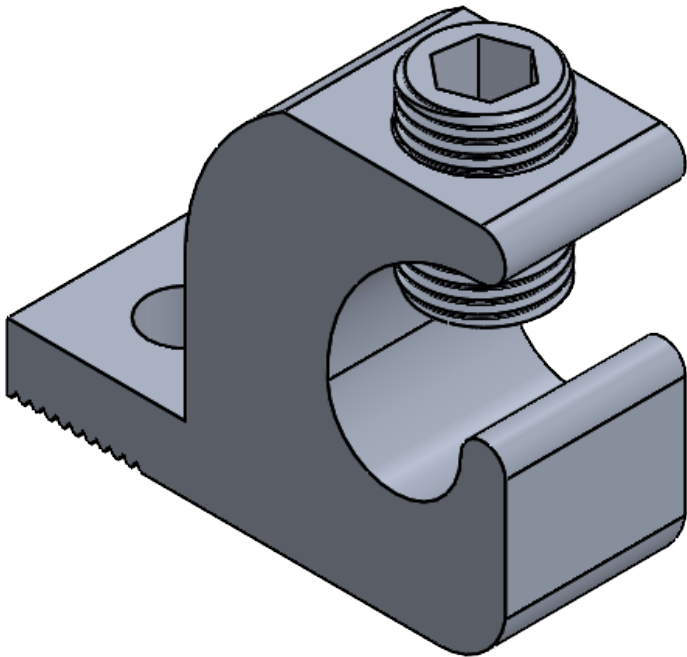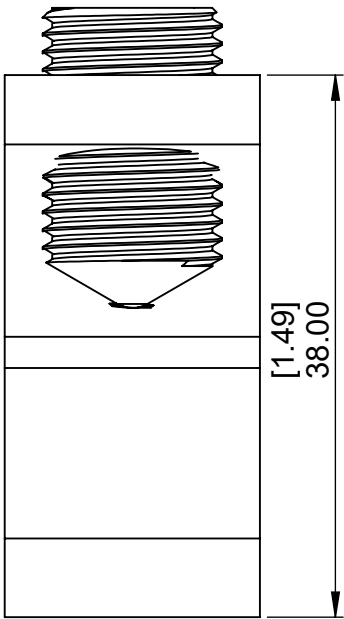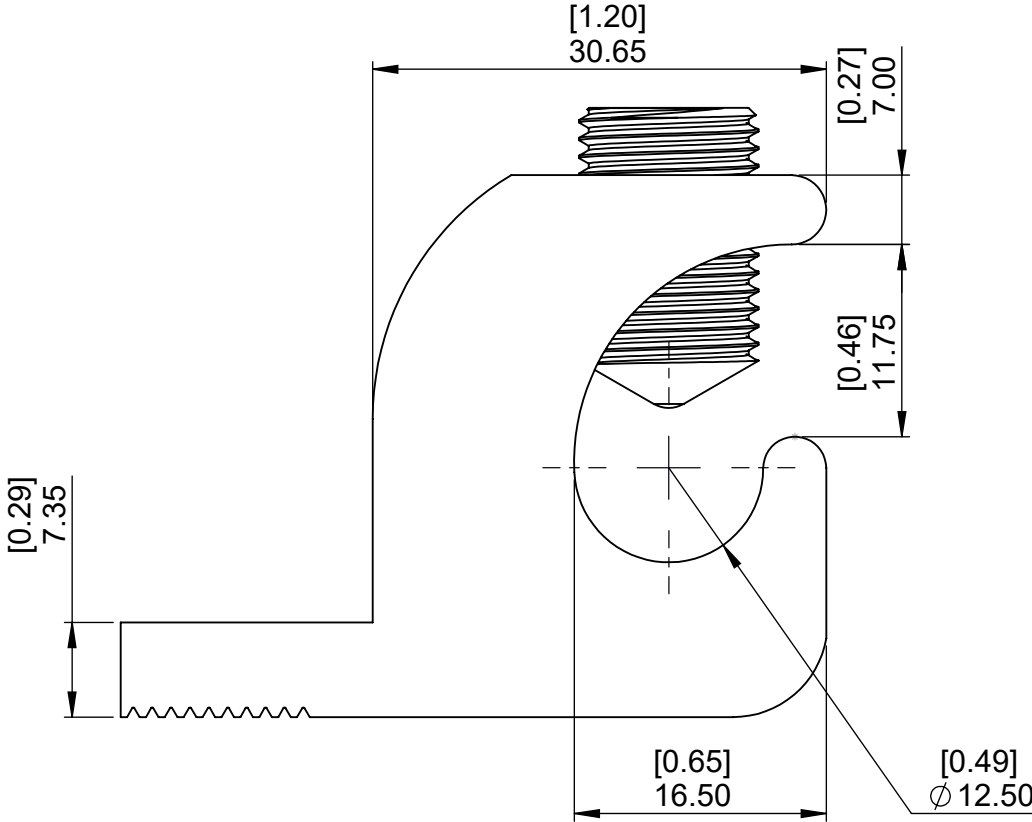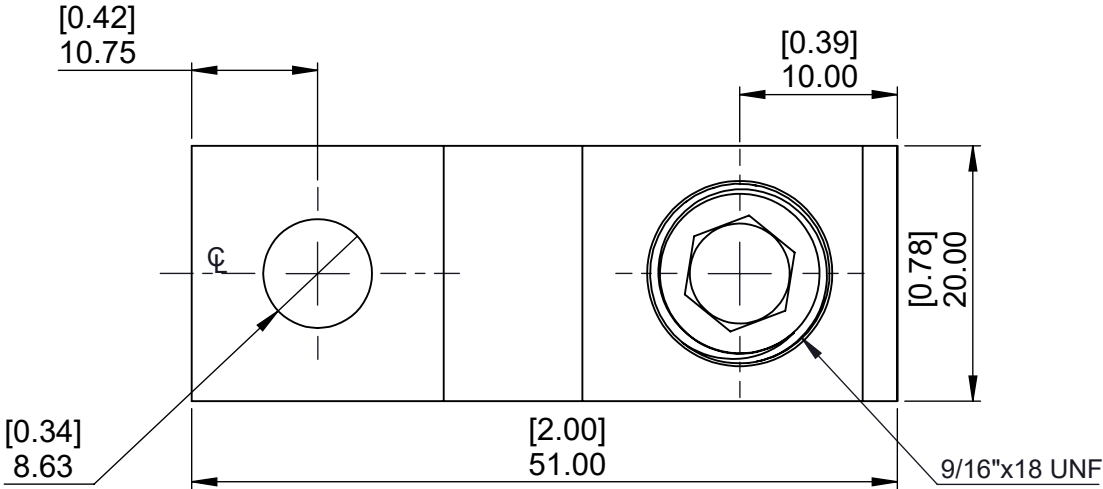

- NOTE :**
- Lay In Feature
 - Manufactured From High Strength Aluminum.
 - Tin Plating For Corrosion Resistance
 - Voltage Rating : 600V
 - Maximum Circuit Rating : 35kv
 - Temperature Rating : 90 °C

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P	11.03.25	
	CHECK	S.P.	11.03.25	
	APPROVED	M.K.	11.03.25	
DWG. NO. OL-0001	PROJECTION: FIRST ANGLE	SIZE A3	TITLE: Aluminum, Lay In Lug	
MATERIAL Refer Note				
FINISH Refer Note				
			Cat Id. 50043A - 50043AS	REV
			DO NOT SCALE DRAWING	SHEET 3 OF 4