Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60001	60001C	60001-BL	60001-GR	#4-14 Sol/Str	02	1.13 [28.70]	1.11 [28.19]	1.38 [35.05]	1/8"	35	3/4"
62001	62001C	62001-BL	62001-GR	#4-14 Sol/Str	03	1.69 [42.92]					
62002	62002C	62002-BL	62002-GR	#4-14 Sol/Str	04	2.25 [57.15]					
62003	62003C	62003-BL	62003-GR	#4-14 Sol/Str	05	2.81 [71.37]					
62004	62004C	62004-BL	62004-GR	#4-14 Sol/Str	06	3.37 [85.59]					
62005	62005C	62005-BL	62005-GR	#4-14 Sol/Str	07	3.93 [99.82]					
62006	62006C	62006-BL	62006-GR	#4-14 Sol/Str	08	4.49 [114.04]					
62007	62007C	62007-BL	62007-GR	#4-14 Sol/Str	09	5.05 [128.27]					
62008	62008C	62008-BL	62008-GR	#4-14 Sol/Str	10	5.61 [142.49]					
62009	62009C	62009-BL	62009-GR	#4-14 Sol/Str	11	6.17 [156.71]					
62010	62010C	62010-BL	62010-GR	#4-14 Sol/Str	12	6.73 [170.94]					
62011	62011C	62011-BL	62011-GR	#4-14 Sol/Str	13	7.29 [185.16]					
62012	62012C	62012-BL	62012-GR	#4-14 Sol/Str	14	7.85 [199.39]					

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

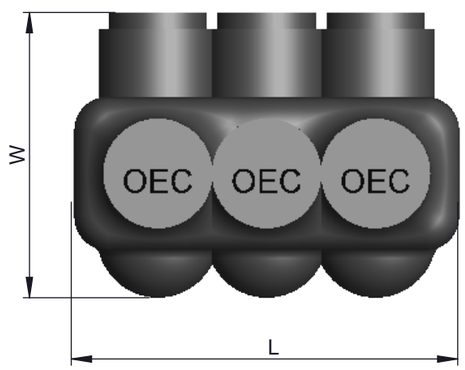

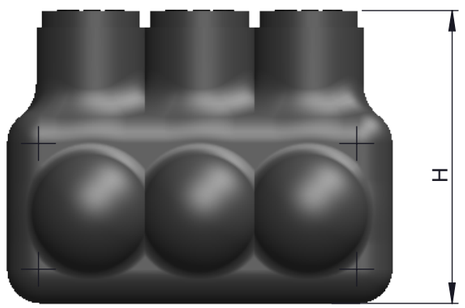

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #4-14
600V 90˚C AL9CU

cULus
LISTED
11 MB

	Tolerance		
	L	W	H
	±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	13.03.25
CHECK	S.P.	13.03.25
APPROVED	M.K.	13.03.25

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0001
PROJECTION: FIRST ANGLE
SIZE A3

TITLE: Insulated Multi-Tap Connectors Single Sided Entry

MATERIAL Refer Note
FINISH Refer Note

Cat Id. 60001 - 62012
REV
DO NOT SCALE DRAWING
SHEET 1 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT