

F

E

D

C

B

A

F

E

D




C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H		
60002	60002C	60002-BL	60002-GR	4-14 Sol/Str	02	1.13 [28.70]	1.31 [33.52]	1.38 [35.05]	1/8	35
63001A	63001AC	63001A-BL	63001A-GR	4-14 Sol/Str	03	1.69 [42.92]				
63002A	63002AC	63002A-BL	63002A-GR	4-14 Sol/Str	04	2.25 [57.15]				
63003A	63003AC	63003A-BL	63003A-GR	4-14 Sol/Str	05	2.81 [71.37]				
63004A	63004AC	63004A-BL	63004A-GR	4-14 Sol/Str	06	3.37 [85.59]				
63005A	63005AC	63005A-BL	63005A-GR	4-14 Sol/Str	07	3.93 [99.82]				
63006A	63006AC	63006A-BL	63006A-GR	4-14 Sol/Str	08	4.49 [114.04]				
63007A	63007AC	63007A-BL	63007A-GR	4-14 Sol/Str	09	5.05 [128.27]				
63008A	63008AC	63008A-BL	63008A-GR	4-14 Sol/Str	10	5.61 [142.49]				
63009A	63009AC	63009A-BL	63009A-GR	4-14 Sol/Str	11	6.17 [156.71]				
63010A	63010AC	63010A-BL	63010A-GR	4-14 Sol/Str	12	6.73 [170.94]				
63010A-13	63010AC-13	63010A-BL-13	63010A-GR-13	4-14 Sol/Str	13	7.29 [185.16]				
63010A-14	63010AC-14	63010A-BL-14	63010A-GR-14	4-14 Sol/Str	14	7.85 [199.39]				

- Note:
- Insulated With High Dieelectric Access Plastisol
 - Dual Rated For Copper And Aluminum Conductors
 - Wire Range: 750Kcmil-14
 - UL486 A/B Listed For Wire Connectors
 - Cold Temperature Rated Up To -45°C
 - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
 - Supplies With Removable Access Plugs
 - Black Insulation Is UV Resistant
 - Insulation UV Stablized & Listed To UL94 With V0 Flammability
 - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs
 - Standard Finish Black/Clear
 - Available In Colors : Black, Clear, Blue, Gray

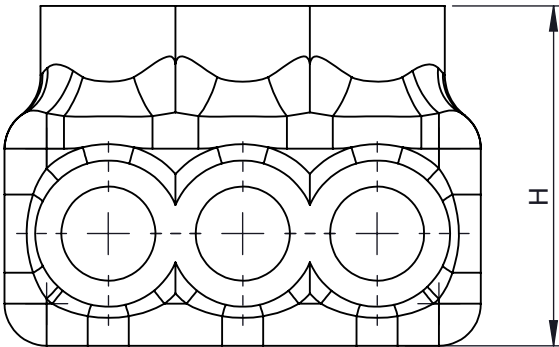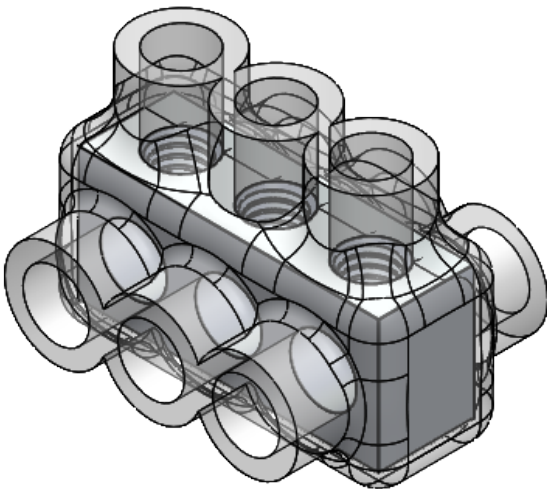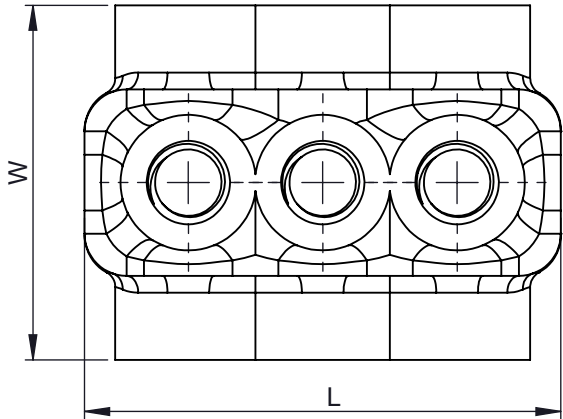

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015	NAME	DATE	OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P.	15.03.25
	CHECK	S.P.	15.03.25
	APPROVED	M.K.	15.03.25
DWG. NO. OIM-0002	PROJECTION	FIRST ANGLE	SIZE A3
MATERIAL Refer Note			TITLE: Insulated Multi-Tap Connectors Dual Sided Entry
FINISH Refer Note			Cat Id. 60002 - 63010A-14 REV
			DO NOT SCALE DRAWING SHEET 1 OF 10