


87654321

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60003BM	60003BMC	60003BM-BL	60003BM-GR	#2-14 Sol/Str	02	2.50 [63.50]	1.41 [35.81]	1.38 [35.05]	Slot Head	50	1.00"	
65013B	65013BC	65013B-BL	65013B-GR	#2-14 Sol/Str	03	3.14 [79.75]						
65014B	65014BC	65014B-BL	65014B-GR	#2-14 Sol/Str	04	3.77 [95.75]						
65015B	65015BC	65015B-BL	65015B-GR	#2-14 Sol/Str	05	4.40 [111.76]						
65016B	65016BC	65016B-BL	65016B-GR	#2-14 Sol/Str	06	5.03 [127.76]						
65017B	65017BC	65017B-BL	65017B-GR	#2-14 Sol/Str	07	5.66 [143.76]						
65018B	65018BC	65018B-BL	65018B-GR	#2-14 Sol/Str	08	6.29 [159.76]						
65019B	65019BC	65019B-BL	65019B-GR	#2-14 Sol/Str	09	6.92 [175.76]						
65020B	65020BC	65020B-BL	65020B-GR	#2-14 Sol/Str	10	7.55 [191.77]						
65021B	65021BC	65021B-BL	65021B-GR	#2-14 Sol/Str	11	8.18 [207.77]						
65022B	65022BC	65022B-BL	65022B-GR	#2-14 Sol/Str	12	8.81 [233.77]						
65023B	65023BC	65023B-BL	65023B-GR	#2-14 Sol/Str	13	9.44 [239.77]						
65024B	65024BC	65024B-BL	65024B-GR	#2-14 Sol/Str	14	10.00 [256.54]						


L

W

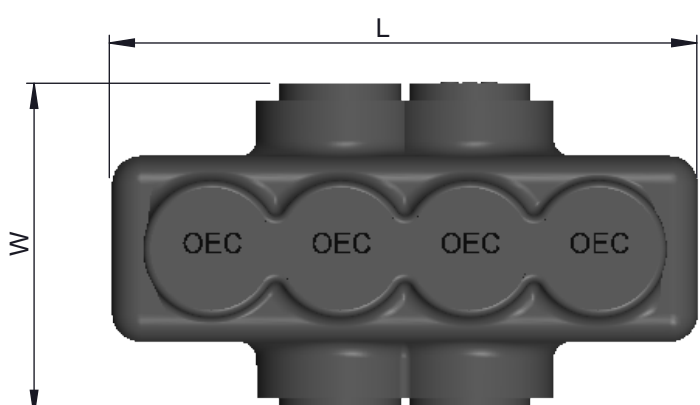

H



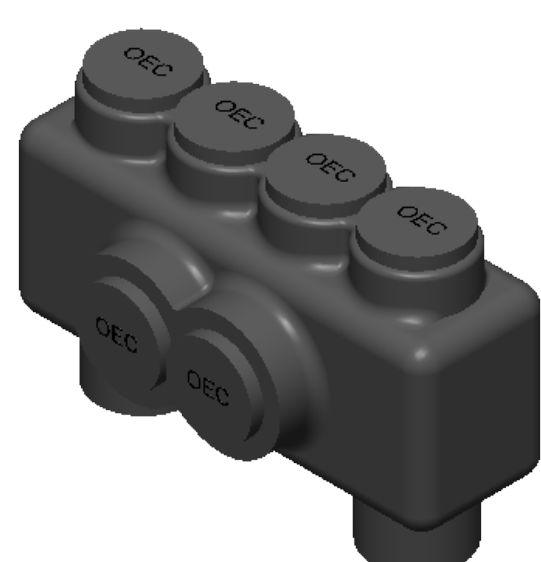

Marking

OEC

Wire Connector

Catlog ID : XXXXX

Wire Range : #2-14

600V 90°C AL9CU

cULus LISTED 11 MB

TOLERANCES-UNLESS OTHERWISE SPECIFIED					NAME		DATE		OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
2 PL. DEC. ±.015 TRUE C.L. ±.015		DRAWN		R.P		18.03.25				
		CHECK		S.P.		18.03.25				
		APPROVED		M.K.		18.03.25				
DWG. NO.		PROJECTION		FIRST ANGLE		SIZE		TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting		
OIM-0004						A3				
MATERIAL		Refer Note								
FINISH		Refer Note						Cat Id. 60003BM - 65024B		REV
								DO NOT SCALE DRAWING		SHEET 2 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

87654321