

F

E

D

C

B

A

F

E




D

C


B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60003D	60003DC	60003D-BL	60003D-GR	02	1.69 [42.92]	1.64 [41.65]	1.72 [43.68]	3/16	100		
60003D-3	60003DC-3	60003D-BL-3	60003D-GR-3	03	2.54 [64.51]						
60003D-4	60003DC-4	60003D-BL-4	60003D-GR-4	04	3.38 [85.85]						
60003D-5	60003DC-5	60003D-BL-5	60003D-GR-5	05	4.23 [107.44]						
60003D-6	60003DC-6	60003D-BL-6	60003D-GR-6	06	5.07 [128.77]						
60003D-7	60003DC-7	60003D-BL-7	60003D-GR-7	07	5.92 [150.36]						
60003D-8	60003DC-8	60003D-BL-8	60003D-GR-8	08	6.76 [171.70]						
60003D-9	60003DC-9	60003D-BL-9	60003D-GR-9	09	7.61 [193.29]						
60003D-10	60003DC-10	60003D-BL-10	60003D-GR-10	10	8.45 [214.63]						
60003D-11	60003DC-11	60003D-BL-11	60003D-GR-11	11	9.30 [236.22]						
60003D-12	60003DC-12	60003D-BL-12	60003D-GR-12	12	10.14 [257.55]						
60003D-13	60003DC-13	60003D-BL-13	60003D-GR-13	13	10.99 [279.14]						
60003D-14	60003DC-14	60003D-BL-14	60003D-GR-14	14	11.83 [300.48]						

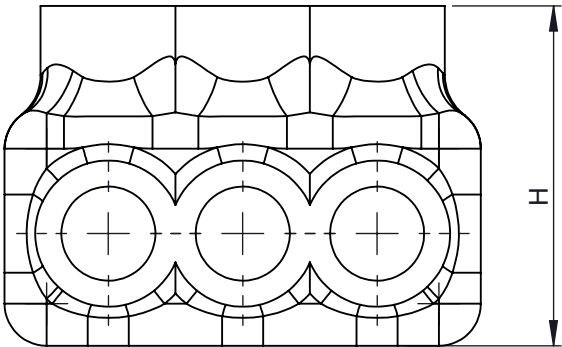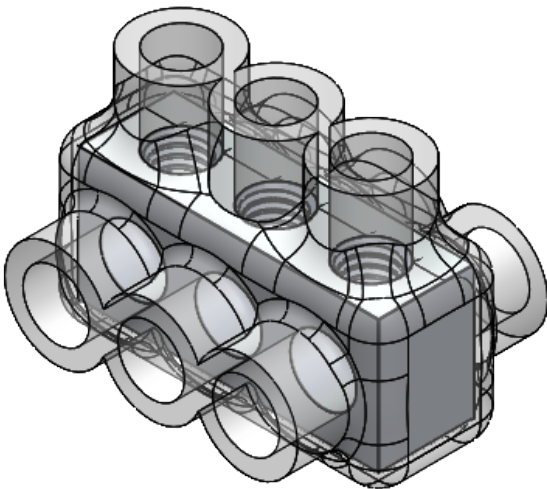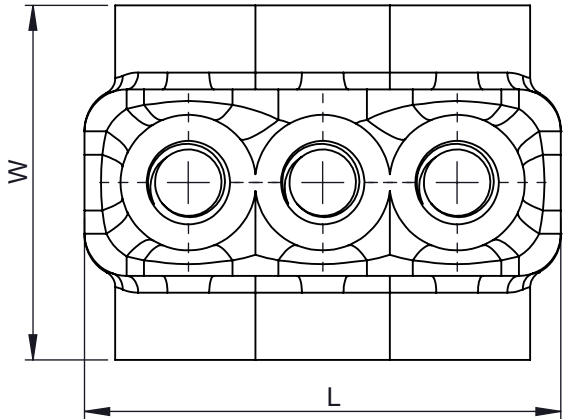

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

			Tolerance		
			L	W	H
			±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME		OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN			
		CHECK			
		APPROVED			
		R.P.	15.03.25		
		S.P.	15.03.25		
		M.K.	15.03.25		
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE		TITLE:	
				Insulated Multi-Tap Connectors Dual Sided Entry	
MATERIAL Refer Note		SIZE A3			
FINISH Refer Note				Cat Id. 60003D - 60003D-14	REV
				DO NOT SCALE DRAWING	SHEET 3 OF 10