

F

E

D

C

B

A

F

E


D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60003DM	60003DMC	60003DM-BL	60003DM-GR	#1/0-14 Sol/Str	02	3.38 [85.85]	1.64 [41.65]	1.72 [43.68]	3/16	100	1.00"	
60003DM-3	60003DMC-3	60003DM-BL-3	60003DM-GR-3	#1/0-14 Sol/Str	03	4.06 [103.12]						
60003DM-4	60003DMC-4	60003DM-BL-4	60003DM-GR-4	#1/0-14 Sol/Str	04	4.74 [120.39]						
60003DM-5	60003DMC-5	60003DM-BL-5	60003DM-GR-5	#1/0-14 Sol/Str	05	5.42 [137.66]						
60003DM-6	60003DMC-6	60003DM-BL-6	60003DM-GR-6	#1/0-14 Sol/Str	06	6.10 [154.94]						
60003DM-7	60003DMC-7	60003DM-BL-7	60003DM-GR-7	#1/0-14 Sol/Str	07	6.78 [172.21]						
60003DM-8	60003DMC-8	60003DM-BL-8	60003DM-GR-8	#1/0-14 Sol/Str	08	7.46 [189.48]						
60003DM-9	60003DMC-9	60003DM-BL-9	60003DM-GR-9	#1/0-14 Sol/Str	09	8.15 [207.01]						
60003DM-10	60003DMC-10	60003DM-BL-10	60003DM-GR-10	#1/0-14 Sol/Str	10	8.80 [223.52]						
60003DM-11	60003DMC-11	60003DM-BL-11	60003DM-GR-11	#1/0-14 Sol/Str	11	9.50 [241.30]						
60003DM-12	60003DMC-12	60003DM-BL-12	60003DM-GR-12	#1/0-14 Sol/Str	12	10.85 [275.59]						
60003DM-13	60003DMC-13	60003DM-BL-13	60003DM-GR-13	#1/0-14 Sol/Str	13	11.50 [292.10]						
60003DM-14	60003DMC-14	60003DM-BL-14	60003DM-GR-14	#1/0-14 Sol/Str	14	12.20 [309.88]						

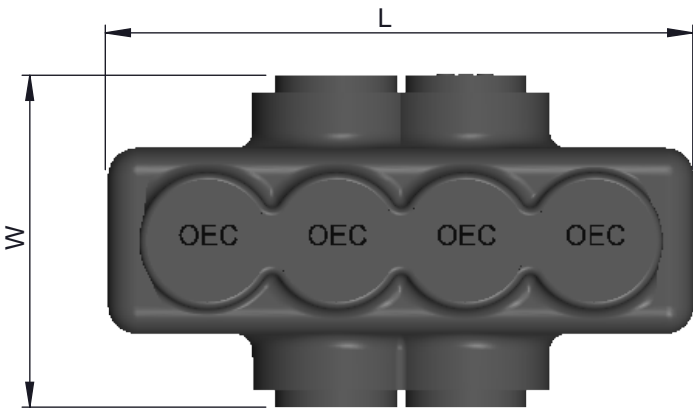

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #1/0-14
600V 90 °C AL9CU

cULus
LISTED
11 MB



			Tolerance		
			L	W	H
			±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN	R.P		
		CHECK	S.P.		
		APPROVED	M.K.		
DWG. NO. OIM-0004	PROJECTION:  FIRST ANGLE		SIZE A3	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting	
MATERIAL Refer Note					
FINISH Refer Note			Cat Id. 60003DM - 60003DM-14 REV		
			DO NOT SCALE DRAWING SHEET 3 OF 10		