

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60003M	60003MC	60003M-BL	60003M-GR	1/0-14 Sol/Str	02	3.38 [85.85]	1.39 [35.30]	1.72 [43.68]	3/16	100	
64013	64013C	64013-BL	64013-GR	1/0-14 Sol/Str	03	4.23 [107.44]					
64014	64014C	64014-BL	64014-GR	1/0-14 Sol/Str	04	5.07 [128.77]					
64015	64015C	64015-BL	64015-GR	1/0-14 Sol/Str	05	5.92 [150.36]					
64016	64016C	64016-BL	64016-GR	1/0-14 Sol/Str	06	6.76 [171.70]					
64017	64017C	64017-BL	64017-GR	1/0-14 Sol/Str	07	7.61 [193.29]					
64018	64018C	64018-BL	64018-GR	1/0-14 Sol/Str	08	8.45 [214.63]					
64019	64019C	64019-BL	64019-GR	1/0-14 Sol/Str	09	9.30 [236.22]					
64020	64020C	64020-BL	64020-GR	1/0-14 Sol/Str	10	10.14 [257.55]					
64021	64021C	64021-BL	64021-GR	1/0-14 Sol/Str	11	10.99 [279.14]					
64022	64022C	64022-BL	64022-GR	1/0-14 Sol/Str	12	11.83 [300.48]					
62023	62023C	62023-BL	62023-GR	1/0-14 Sol/Str	13	12.68 [322.07]					
62024	62024C	62024-BL	62024-GR	1/0-14 Sol/Str	14	13.52 [343.40]					

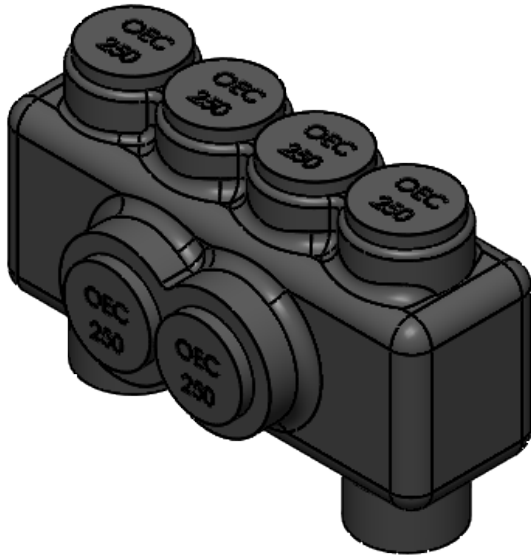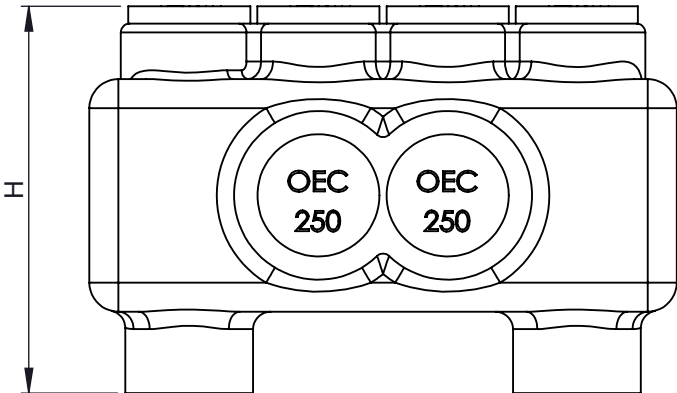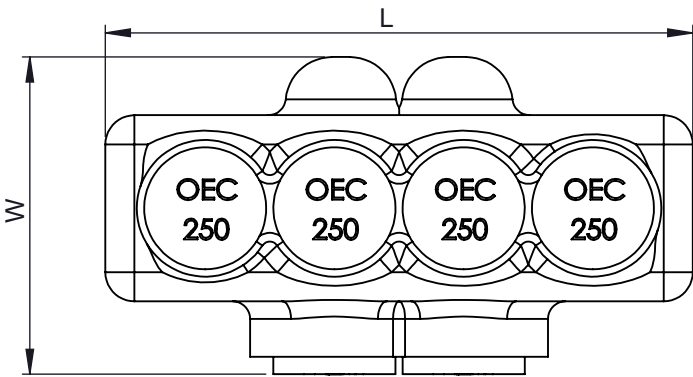

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015	NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P.	15.03.25
	CHECK	S.P.	15.03.25
	APPROVED	M.K.	15.03.25
DWG. NO. OIM-0003	PROJECTION	FIRST ANGLE	SIZE A3
MATERIAL Refer Note			TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting
FINISH Refer Note			Cat Id. 60003M - 64024 DO NOT SCALE DRAWING
			REV SHEET 3 OF 10