

F

E

D

C

B

A

F

E

D




C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H		
60004	60004C	60004-BL	60004-GR	3/0-14 Sol/Str	02	2.00 [50.80]	2.00 [50.80]	2.00 [50.80]	1/4	100
63001	63001C	63001-BL	63001-GR	3/0-14 Sol/Str	03	3.00 [76.20]				
63002	63002C	63002-BL	63002-GR	3/0-14 Sol/Str	04	4.00 [101.60]				
63003	63003C	63003-BL	63003-GR	3/0-14 Sol/Str	05	5.00 [127.00]				
63004	63004C	63004-BL	63004-GR	3/0-14 Sol/Str	06	6.00 [152.40]				
63005	63005C	63005-BL	63005-GR	3/0-14 Sol/Str	07	7.00 [177.80]				
63006	63006C	63006-BL	63006-GR	3/0-14 Sol/Str	08	8.00 [203.20]				
63007	63007C	63007-BL	63007-GR	3/0-14 Sol/Str	09	9.00 [228.60]				
63008	63008C	63008-BL	63008-GR	3/0-14 Sol/Str	10	10.00 [254.00]				
63009	63009C	63009-BL	63009-GR	3/0-14 Sol/Str	11	11.00 [279.40]				
63010	63010C	63010-BL	63010-GR	3/0-14 Sol/Str	12	12.00 [304.80]				
63010-13	63010C-13	63010-BL-13	63010-GR-13	3/0-14 Sol/Str	13	13.00 [330.20]				
63010-14	63010C-14	63010-BL-14	63010-GR-14	3/0-14 Sol/Str	14	14.00 [355.60]				

- Note:
- Insulated With High Dieelectric Access Plastisol
 - Dual Rated For Copper And Aluminum Conductors
 - Wire Range: 750Kcmil-14
 - UL486 A/B Listed For Wire Connectors
 - Cold Temperature Rated Up To -45°C
 - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
 - Supplies With Removable Access Plugs
 - Black Insulation Is UV Resistant
 - Insulation UV Stablized & Listed To UL94 With V0 Flammability
 - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs
 - Standard Finish Black/Clear
 - Available In Colors : Black, Clear, Blue, Gray

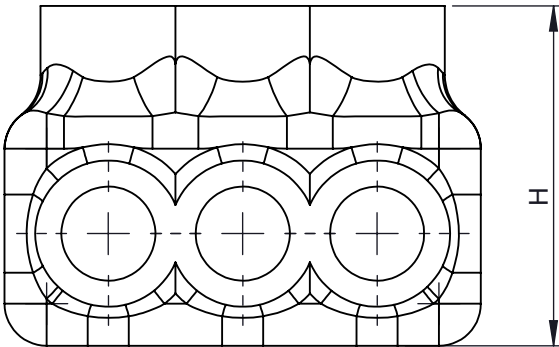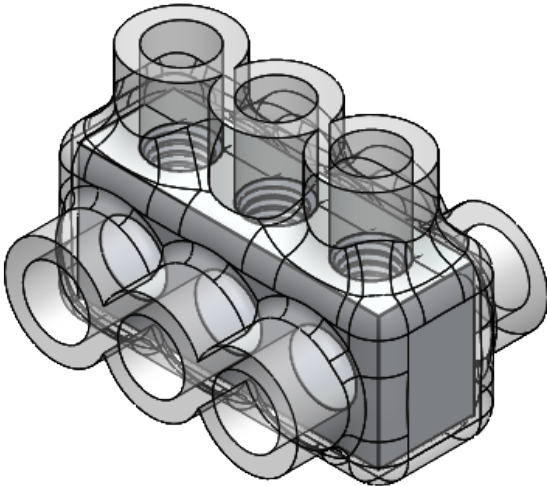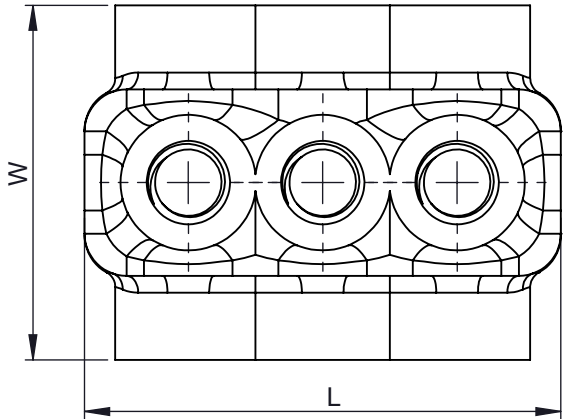

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

				Tolerance			
				L	W	H	
				±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±0.15 TRUE C.L. ±0.15 3 PL. DEC. ±0.15 ANGLES ±0.15			NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
			DRAWN	R.P.			15.03.25
			CHECK	S.P.			15.03.25
			APPROVED	M.K.			15.03.25
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE		 	SIZE A3	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry	
MATERIAL Refer Note							
FINISH Refer Note							
Cat Id. 60004 - 63010-14						REV	
DO NOT SCALE DRAWING						SHEET 5 OF 10	