Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60004AM	60004AMC	60004AM-BL	60004AM-GR	#2/0-14 Sol/Str	02	3.38 [85.85]	1.80 [45.72]	1.72 [43.68]	3/16"	100	1.00"
65001B	65001BC	65001B-BL	65001B-GR	#2/0-14 Sol/Str	03	4.23 [107.44]					
65002B	65002BC	65002B-BL	65002B-GR	#2/0-14 Sol/Str	04	5.07 [128.77]					
65003B	65003BC	65003B-BL	65003B-GR	#2/0-14 Sol/Str	05	5.92 [150.36]					
65004B	65004BC	65004B-BL	65004B-GR	#2/0-14 Sol/Str	06	6.76 [171.70]					
65005B	65005BC	65005B-BL	65005B-GR	#2/0-14 Sol/Str	07	7.61 [193.29]					
65006B	65006BC	65006B-BL	65006B-GR	#2/0-14 Sol/Str	08	8.45 [214.63]					
65007B	65007BC	65007B-BL	65007B-GR	#2/0-14 Sol/Str	09	9.30 [236.22]					
65008B	65008BC	65008B-BL	65008B-GR	#2/0-14 Sol/Str	10	10.14 [257.55]					
65009B	65009BC	65009B-BL	65009B-GR	#2/0-14 Sol/Str	11	10.99 [279.14]					
650010B	650010BC	650010B-BL	650010B-GR	#2/0-14 Sol/Str	12	11.83 [300.48]					
65010B-13	65010BC-13	65010B-BL-13	65010B-GR-13	#2/0-14 Sol/Str	13	12.68 [322.07]					
65010B-14	65010BC-14	65010B-BL-14	65010B-GR-14	#2/0-14 Sol/Str	14	13.52 [343.40]					

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

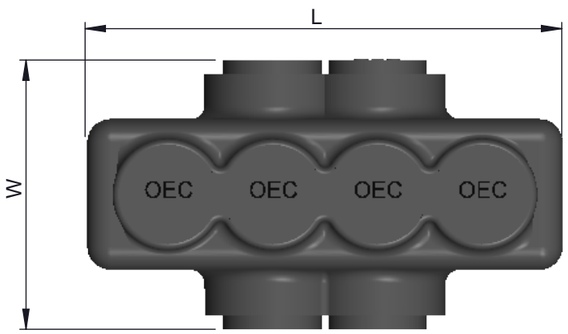

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #2/0-14
600V 90˚C AL9CU

cULus
LISTED
11 MB

	Tolerance		
	L	W	H
	±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	18.03.25
CHECK	S.P.	18.03.25
APPROVED	M.K.	18.03.25

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0004
PROJECTION: FIRST ANGLE
SIZE A3
TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting
MATERIAL Refer Note
FINISH Refer Note
Cat Id. 60004AM - 65010B-14
REV
DO NOT SCALE DRAWING
SHEET 4 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT