

F

E

D

C

B

A

F

E


D

C

B

A


Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60004M	60004MC	60004M-BL	60004M-GR	#3/0-14 Sol/Str	02	4.00 [101.60]	2.00 [50.80]	2.00 [50.80]	1/4"	100	1.00"	
65001	65001C	65001-BL	65001-GR	#3/0-14 Sol/Str	03	5.00 [127.00]						
65002	65002C	65002-BL	65002-GR	#3/0-14 Sol/Str	04	6.00 [152.40]						
65003	65003C	65003-BL	65003-GR	#3/0-14 Sol/Str	05	7.00 [177.80]						
65004	65004C	65004-BL	65004-GR	#3/0-14 Sol/Str	06	8.00 [203.20]						
65005	65005C	65005-BL	65005-GR	#3/0-14 Sol/Str	07	9.00 [228.60]						
65006	65006C	65006-BL	65006-GR	#3/0-14 Sol/Str	08	10.00 [254.00]						
65007	65007C	65007-BL	65007-GR	#3/0-14 Sol/Str	09	11.00 [279.40]						
65008	65008C	65008-BL	65008-GR	#3/0-14 Sol/Str	10	12.00 [304.80]						
65009	65009C	65009-BL	65009-GR	#3/0-14 Sol/Str	11	13.00 [330.20]						
65010	65010C	65010-BL	65010-GR	#3/0-14 Sol/Str	12	14.00 [355.60]						
65010-13	65010C-13	65010-BL-13	65010-GR-13	#3/0-14 Sol/Str	13	15.00 [381.00]						
65010-14	65010C-14	65010-BL-14	65010-GR-14	#3/0-14 Sol/Str	14	16.00 [406.40]						

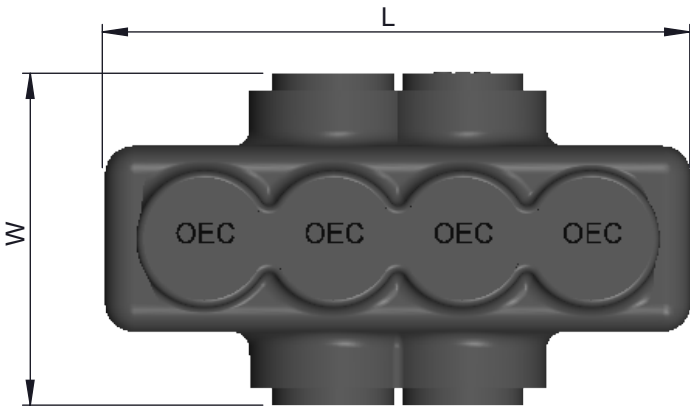

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #3/0-14
600V 90°C AL9CU

cULus
LISTED
11 MB

		Tolerance			
		L	W	H	
		±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN	R.P		18.03.25
		CHECK	S.P.		18.03.25
		APPROVED	M.K.		18.03.25
DWG. NO. OIM-0004	PROJECTION	FIRST ANGLE	SIZE A3	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting	
MATERIAL Refer Note					
FINISH Refer Note				Cat Id. 60004M - 65010-14	REV
				DO NOT SCALE DRAWING	SHEET 5 OF 10