Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60005	60005C	60005-BL	60005-GR	#3/0-14 Sol/Str	02	2.00 [50.80]	1.70 [43.18]	2.00 [50.80]	1/4"	100	1.00"
62025	62025C	62025-BL	62025-GR	#3/0-14 Sol/Str	03	3.00 [76.20]					
62026	62026C	62026-BL	62026-GR	#3/0-14 Sol/Str	04	4.00 [101.60]					
62027	62027C	62027-BL	62027-GR	#3/0-14 Sol/Str	05	5.00 [127.00]					
62028	62028C	62028-BL	62028-GR	#3/0-14 Sol/Str	06	6.00 [152.40]					
62029	62029C	62029-BL	62029-GR	#3/0-14 Sol/Str	07	7.00 [177.80]					
62030	62030C	62030-BL	62030-GR	#3/0-14 Sol/Str	08	8.00 [203.20]					
62031	62031C	62031-BL	62031-GR	#3/0-14 Sol/Str	09	9.00 [228.60]					
62032	62032C	62032-BL	62032-GR	#3/0-14 Sol/Str	10	10.00 [254.00]					
62033	62033C	62033-BL	62033-GR	#3/0-14 Sol/Str	11	11.00 [279.40]					
62034	62034C	62034-BL	62034-GR	#3/0-14 Sol/Str	12	12.00 [304.80]					
62035	62035C	62035-BL	62035-GR	#3/0-14 Sol/Str	13	13.00 [330.20]					
62036	62036C	62036-BL	62036-GR	#3/0-14 Sol/Str	14	14.00 [355.60]					

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

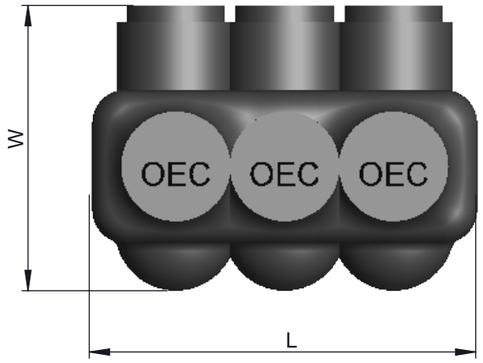

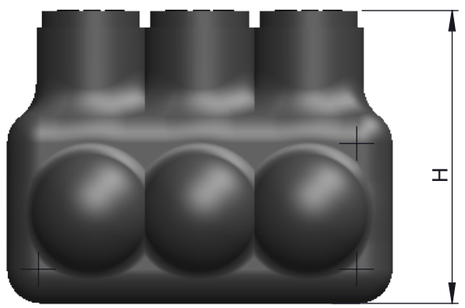

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #3/0-14
600V 90˚C AL9CU

cULus
LISTED
11 MB

Tolerance		
L	W	H
±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	13.03.25
CHECK	S.P.	13.03.25
APPROVED	M.K.	13.03.25

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0001
PROJECTION: FIRST ANGLE
SIZE A3

TITLE: Insulated Multi-Tap Connectors Single Sided Entry

MATERIAL Refer Note
FINISH Refer Note

Cat Id. 60005 - 62036
REV
DO NOT SCALE DRAWING
SHEET 5 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT