

F

E



D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60005A	60005AC	60005A-BL	60005A-GR	#2/0-14 Sol/Str	02	1.69 [42.92]	1.53 [38.86]	1.72 [297.68]	3/16"	100	1.00"	
62025A	62025AC	62025A-BL	62025A-GR	#2/0-14 Sol/Str	03	2.54 [64.51]						
62026A	62026AC	62026A-BL	62026A-GR	#2/0-14 Sol/Str	04	3.38 [85.85]						
62027A	62027AC	62027A-BL	62027A-GR	#2/0-14 Sol/Str	05	4.23 [107.44]						
62028A	62028AC	62028A-BL	62028A-GR	#2/0-14 Sol/Str	06	5.07 [128.77]						
62029A	62029AC	62029A-BL	62029A-GR	#2/0-14 Sol/Str	07	5.92 [150.36]						
62030A	62030AC	62030A-BL	62030A-GR	#2/0-14 Sol/Str	08	6.76 [171.70]						
62031A	62031AC	62031A-BL	62031A-GR	#2/0-14 Sol/Str	09	7.61 [193.29]						
62032A	62032AC	62032A-BL	62032A-GR	#2/0-14 Sol/Str	10	8.45 [214.63]						
62033A	62033AC	62033A-BL	62033A-GR	#2/0-14 Sol/Str	11	9.30 [236.22]						
62034A	62034AC	62034A-BL	62034A-GR	#2/0-14 Sol/Str	12	10.14 [257.55]						
62035A	62035AC	62035A-BL	62035A-GR	#2/0-14 Sol/Str	13	10.99 [279.14]						
62036A	62036AC	62036A-BL	62036A-GR	#2/0-14 Sol/Str	14	11.83 [300.48]						

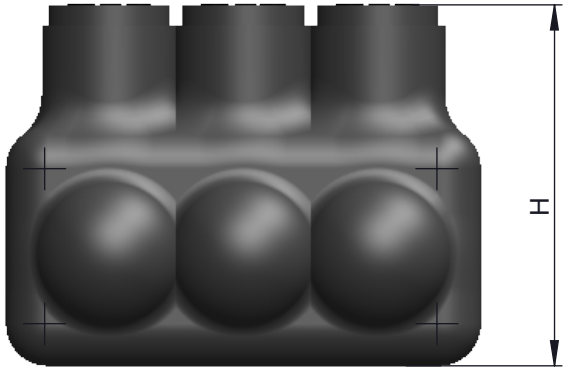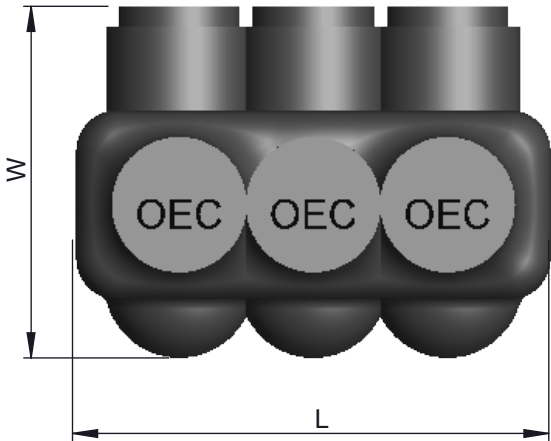

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : #2/0-14
600V 90°C AL9CU

cULus
LISTED
11 MB

		Tolerance		
		L	W	H
		±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P.	13.03.25	
	CHECK	S.P.	13.03.25	
	APPROVED	M.K.	13.03.25	
DWG. NO. OIM-0001	PROJECTION:  FIRST ANGLE		SIZE A3	TITLE: Insulated Multi-Tap Connectors Single Sided Entry
MATERIAL Refer Note				
FINISH Refer Note				
DO NOT SCALE DRAWING				REV
SHEET 4 OF 10				