

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60005AM	60005AMC	60005AM-BL	60005AM-GR	2/0-14 Sol/Str	02	3.38 [85.85]	1.53 [38.86]	1.72 [43.68]	3/16	100	
64025A	64025AC	64025A-BL	64025A-GR	2/0-14 Sol/Str	03	4.23 [107.44]					
64026A	64026AC	64026A-BL	64026A-GR	2/0-14 Sol/Str	04	5.07 [128.77]					
64027A	64027AC	64027A-BL	64027A-GR	2/0-14 Sol/Str	05	5.92 [150.36]					
64028A	64028AC	64028A-BL	64028A-GR	2/0-14 Sol/Str	06	6.76 [171.70]					
64029A	64029AC	64029A-BL	64029A-GR	2/0-14 Sol/Str	07	7.61 [193.29]					
64030A	64030AC	64030A-BL	64030A-GR	2/0-14 Sol/Str	08	8.45 [214.63]					
64031A	64031AC	64031A-BL	64031A-GR	2/0-14 Sol/Str	09	9.30 [236.22]					
64032A	64032AC	64032A-BL	64032A-GR	2/0-14 Sol/Str	10	10.14 [257.55]					
64033A	64033AC	64033A-BL	64033A-GR	2/0-14 Sol/Str	11	10.99 [279.14]					
64034A	64034AC	64034A-BL	64034A-GR	2/0-14 Sol/Str	12	11.83 [300.48]					
62035A	62035AC	62035A-BL	62035A-GR	2/0-14 Sol/Str	13	12.68 [322.07]					
62036A	62036AC	62036A-BL	62036A-GR	2/0-14 Sol/Str	14	13.52 [343.40]					

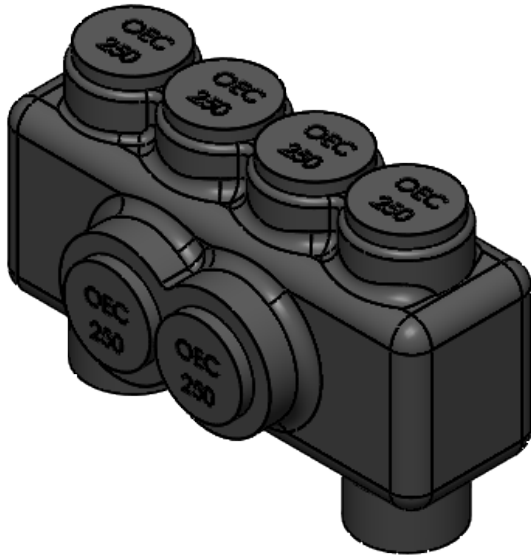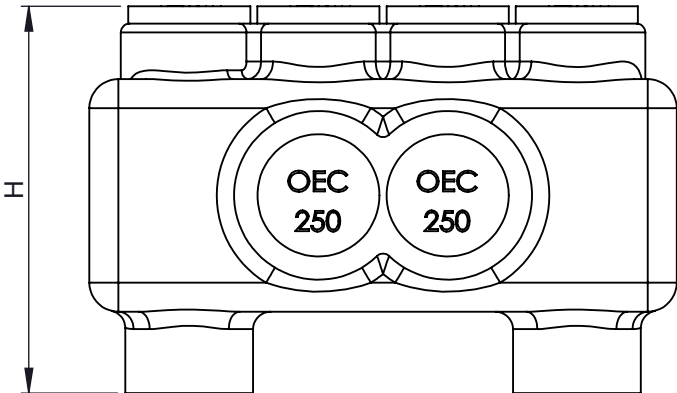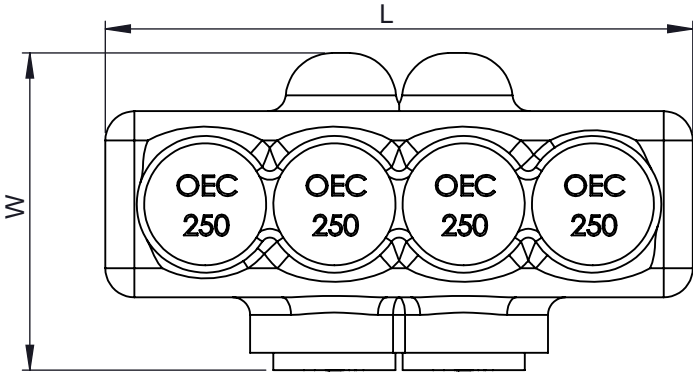

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE
		DRAWN	R.P. 15.03.25
		CHECK	S.P. 15.03.25
		APPROVED	M.K. 15.03.25
DWG. NO. OIM-0003		PROJECTION	FIRST ANGLE
MATERIAL Refer Note		SIZE	A3
FINISH Refer Note		TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting	
		Cat Id. 60005AM - 62036A	REV
		DO NOT SCALE DRAWING	SHEET 4 OF 10

OEC Usa Inc.

106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com