

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60005M	60005MC	60005M-BL	60005M-GR	3/0-14 Sol/Str	02	4.00 [101.60]	1.70 [43.18]	2.00 [50.80]	1/4	100	
64025	64025C	64025-BL	64025-GR	3/0-14 Sol/Str	03	5.00 [127.00]					
64026	64026C	64026-BL	64026-GR	3/0-14 Sol/Str	04	6.00 [152.40]					
64027	64027C	64027-BL	64027-GR	3/0-14 Sol/Str	05	7.00 [177.80]					
64028	64028C	64028-BL	64028-GR	3/0-14 Sol/Str	06	8.00 [203.20]					
64029	64029C	64029-BL	64029-GR	3/0-14 Sol/Str	07	9.00 [228.60]					
64030	64030C	64030-BL	64030-GR	3/0-14 Sol/Str	08	10.00 [254.00]					
64031	64031C	64031-BL	64031-GR	3/0-14 Sol/Str	09	11.00 [279.40]					
64032	64032C	64032-BL	64032-GR	3/0-14 Sol/Str	10	12.00 [304.80]					
64033	64033C	64033-BL	64033-GR	3/0-14 Sol/Str	11	13.00 [330.20]					
64034	64034C	64034-BL	64034-GR	3/0-14 Sol/Str	12	14.00 [355.60]					
62035	62035C	62035-BL	62035-GR	3/0-14 Sol/Str	13	15.00 [381.00]					
62036	62036C	62036-BL	62036-GR	3/0-14 Sol/Str	14	16.00 [406.40]					

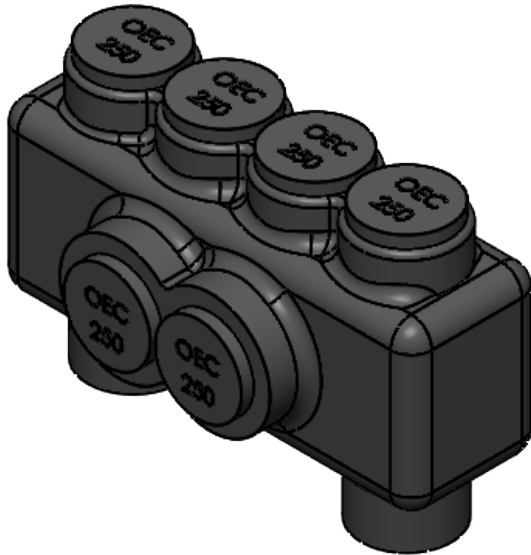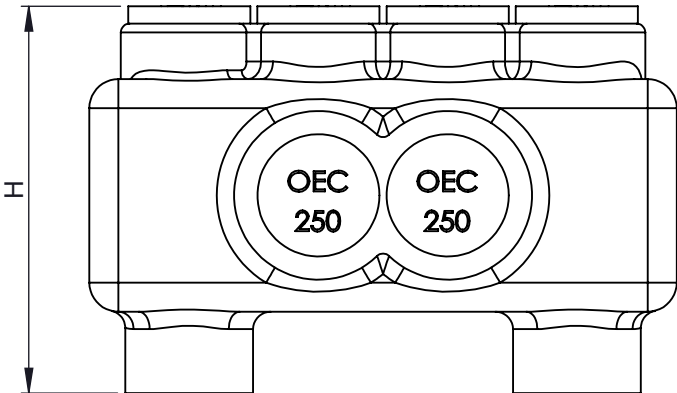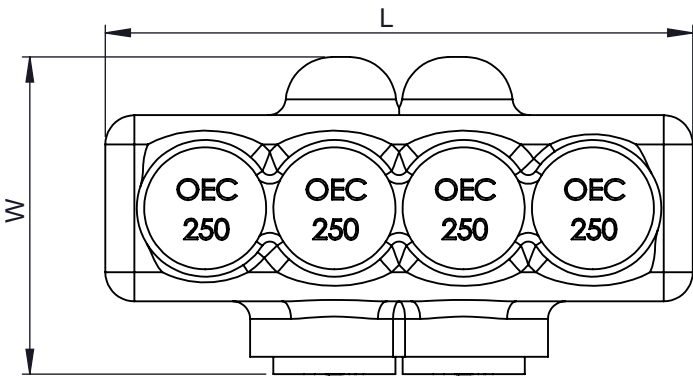

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

		Tolerance			
		L	W	H	
		±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN	R.P.		15.03.25
		CHECK	S.P.		15.03.25
		APPROVED	M.K.		15.03.25
DWG. NO. OIM-0003	PROJECTION: 	FIRST ANGLE 	SIZE A3	TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting	
MATERIAL Refer Note					
FINISH Refer Note				Cat Id. 60005M - 64036	REV
				DO NOT SCALE DRAWING	SHEET 5 OF 10