

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60006	60006C	60006-BL	60006-GR	250 Kcmil - 10 Sol/Str	02	2.18 [55.37]	2.40 [60.96]	2.20 [55.88]	5/16	275	
63011	63011C	63011-BL	63011-GR	250 Kcmil - 10 Sol/Str	03	3.27 [83.05]					
63012	63012C	63012-BL	63012-GR	250 Kcmil - 10 Sol/Str	04	4.36 [110.74]					
63013	63013C	63013-BL	63013-GR	250 Kcmil - 10 Sol/Str	05	5.45 [138.43]					
63014	63014C	63014-BL	63014-GR	250 Kcmil - 10 Sol/Str	06	6.54 [166.11]					
63015	63015C	63015-BL	63015-GR	250 Kcmil - 10 Sol/Str	07	7.63 [193.80]					
63016	63016C	63016-BL	63016-GR	250 Kcmil - 10 Sol/Str	08	8.72 [221.48]					
63017	63017C	63017-BL	63017-GR	250 Kcmil - 10 Sol/Str	09	9.81 [249.17]					
63018	63018C	63018-BL	63018-GR	250 Kcmil - 10 Sol/Str	10	10.90 [276.86]					
63019	63019C	63019-BL	63019-GR	250 Kcmil - 10 Sol/Str	11	11.99 [304.54]					
63020	63020C	63020-BL	63020-GR	250 Kcmil - 10 Sol/Str	12	13.08 [332.23]					
63020-13	63020C-13	63020-BL-13	63020-GR-13	250 Kcmil - 10 Sol/Str	13	14.17 [359.91]					
63020-14	63020C-14	63020-BL-14	63020-GR-14	250 Kcmil - 10 Sol/Str	14	15.26 [387.60]					

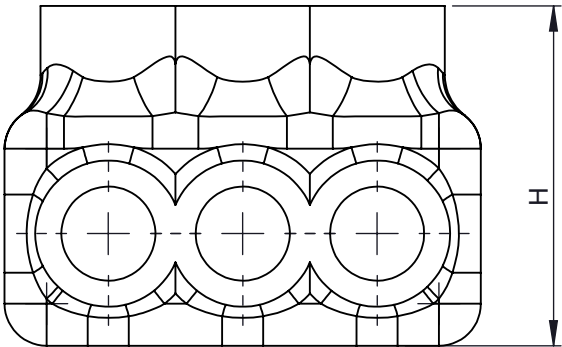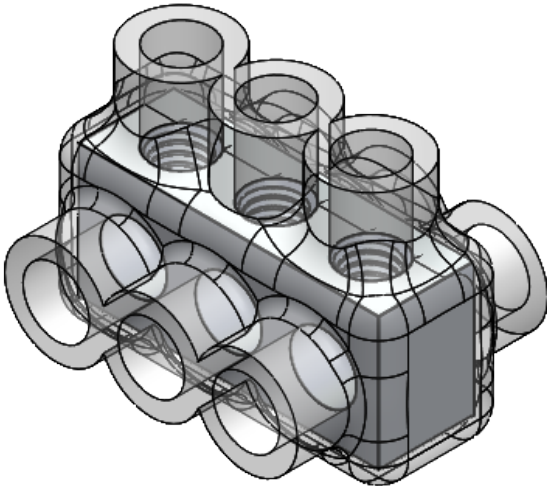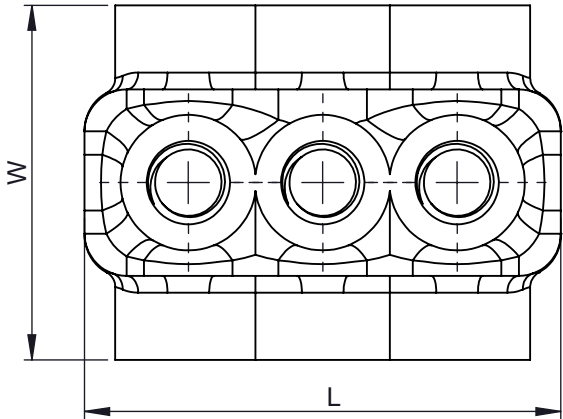

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±0.15 TRUE C.L. ±0.15 3 PL. DEC. ±0.15 ANGLES ±0.15		NAME	DATE
		DRAWN R.P.	15.03.25
		CHECK S.P.	15.03.25
		APPROVED M.K.	15.03.25
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE	SIZE A3
MATERIAL Refer Note		TITLE: Insulated Multi-Tap Connectors Dual Sided Entry	
FINISH Refer Note		Cat Id. 60006 - 63020-14	
		DO NOT SCALE DRAWING	
		SHEET 6 OF 10	

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com