Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60006A	60006AC	60006A-BL	60006A-GR	250 Kcmil - 10 Sol/Str	02	2.18 [55.37]	2.04 [51.81]	2.20 [5.88]	5/16"	275	1.00"
62037	62037C	62037-BL	62037-GR	250 Kcmil - 10 Sol/Str	03	3.27 [83.05]					
62038	62038C	62038-BL	62038-GR	250 Kcmil - 10 Sol/Str	04	4.36 [110.74]					
62039	62039C	62039-BL	62039-GR	250 Kcmil - 10 Sol/Str	05	5.45 [138.43]					
62040	62040C	62040-BL	62040-GR	250 Kcmil - 10 Sol/Str	06	6.54 [166.11]					
62041	62041C	62041-BL	62041-GR	250 Kcmil - 10 Sol/Str	07	7.63 [193.80]					
62042	62042C	62042-BL	62042-GR	250 Kcmil - 10 Sol/Str	08	8.72 [221.48]					
62043	62043C	62043-BL	62043-GR	250 Kcmil - 10 Sol/Str	09	9.81 [249.17]					
62044	62044C	62044-BL	62044-GR	250 Kcmil - 10 Sol/Str	10	10.90 [276.86]					
62045	62045C	62045-BL	62045-GR	250 Kcmil - 10 Sol/Str	11	11.99 [304.54]					
62046	62046C	62046-BL	62046-GR	250 Kcmil - 10 Sol/Str	12	13.08 [332.23]					
62047	62047C	62047-BL	62047-GR	250 Kcmil - 10 Sol/Str	13	14.17 [359.91]					
62048	62048C	62048-BL	62048-GR	250 Kcmil - 10 Sol/Str	14	15.26 [387.60]					

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

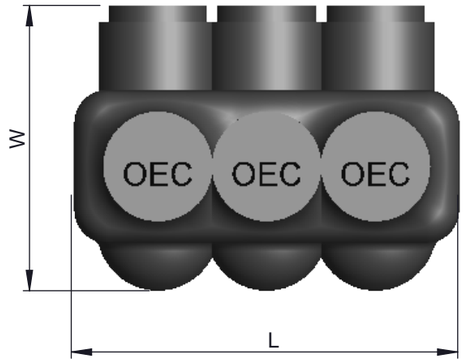

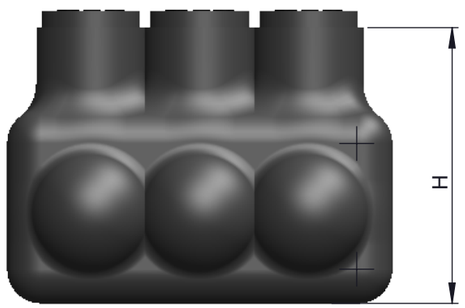

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : 250-10
600V 90˚C AL9CU

cULus
LISTED
11 MB

Tolerance		
L	W	H
±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	13.03.25
CHECK	S.P.	13.03.25
APPROVED	M.K.	13.03.25

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0001
PROJECTION: FIRST ANGLE
SIZE A3

TITLE: Insulated Multi-Tap Connectors Single Sided Entry

MATERIAL Refer Note
FINISH Refer Note

Cat Id. 60006A - 62048
REV
DO NOT SCALE DRAWING
SHEET 6 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT