

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60006AM	60006AMC	60006AM-BL	60006AM-GR	250Kcmil-10 Sol/Str	02	4.36 [110.74]	2.04 [51.81]	2.20 [55.88]	5/16	275	
64037	64037C	64037-BL	64037-GR	250Kcmil-10 Sol/Str	03	5.45 [138.43]					
64038	64038C	64038-BL	64038-GR	250Kcmil-10 Sol/Str	04	6.54 [166.11]					
64039	64039C	64039-BL	64039-GR	250Kcmil-10 Sol/Str	05	7.63 [193.80]					
64040	64040C	64040-BL	64040-GR	250Kcmil-10 Sol/Str	06	8.72 [221.48]					
64041	64041C	64041-BL	64041-GR	250Kcmil-10 Sol/Str	07	9.81 [249.17]					
64042	64042C	64042-BL	64042-GR	250Kcmil-10 Sol/Str	08	10.90 [276.86]					
64043	64043C	64043-BL	64043-GR	250Kcmil-10 Sol/Str	09	11.99 [304.54]					
64044	64044C	64044-BL	64044-GR	250Kcmil-10 Sol/Str	10	13.08 [332.23]					
64045	64045C	64045-BL	64045-GR	250Kcmil-10 Sol/Str	11	14.17 [359.91]					
64046	64046C	64046-BL	64046-GR	250Kcmil-10 Sol/Str	12	15.26 [387.60]					
62047	62047C	62047-BL	62047-GR	250Kcmil-10 Sol/Str	13	16.35 [415.29]					
62048	62048C	62048-BL	62048-GR	250Kcmil-10 Sol/Str	14	17.44 [442.97]					

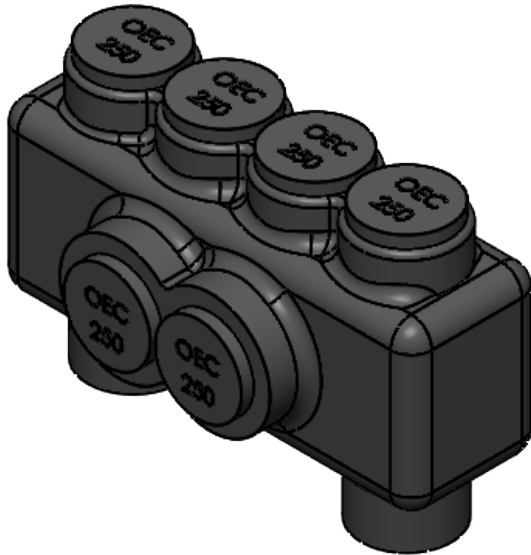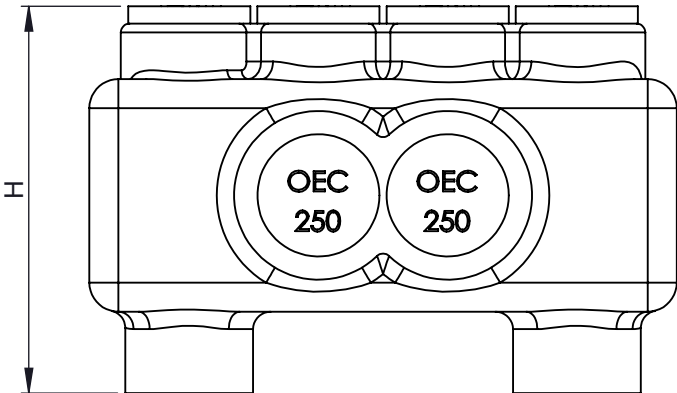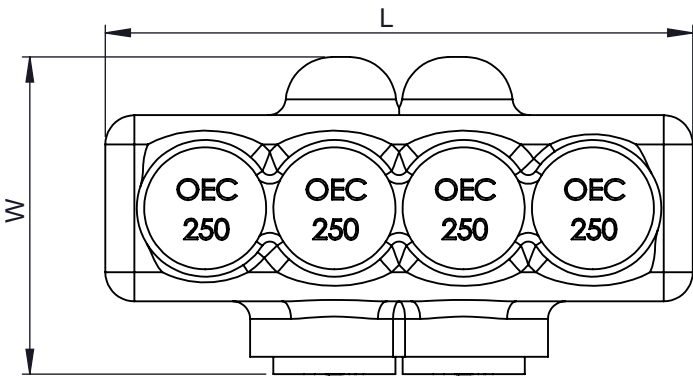

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

			Tolerance		
			L	W	H
			±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN	R.P.		
		CHECK	S.P.		
		APPROVED	M.K.		
DWG. NO. OIM-0003		PROJECTION: 	FIRST ANGLE 	SIZE A3	TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting
MATERIAL Refer Note					
FINISH Refer Note		Cat Id. 60006AM - 64048			REV
			DO NOT SCALE DRAWING		
			SHEET 6 OF 10		