

F

E

D

C

B

A

F

E


D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60006M	60006MC	60006M-BL	60006M-GR	250Kcmil-10 Sol/Str	02	4.36 [110.74]	2.40 [60.961]	2.20 [55.88]	5/16"	275	1.00"	
65011	65011C	65011-BL	65011-GR	250Kcmil-10 Sol/Str	03	5.45 [138.43]						
65012	65012C	65012-BL	65012-GR	250Kcmil-10 Sol/Str	04	6.54 [166.11]						
65013	65013C	65013-BL	65013-GR	250Kcmil-10 Sol/Str	05	7.63 [193.80]						
65014	65014C	65014-BL	65014-GR	250Kcmil-10 Sol/Str	06	8.72 [221.48]						
65015	65015C	65015-BL	65015-GR	250Kcmil-10 Sol/Str	07	9.81 [249.17]						
65016	65016C	65016-BL	65016-GR	250Kcmil-10 Sol/Str	08	10.90 [276.86]						
65017	65017C	65017-BL	65017-GR	250Kcmil-10 Sol/Str	09	11.99 [304.54]						
65018	65018C	65018-BL	65018-GR	250Kcmil-10 Sol/Str	10	13.08 [332.23]						
65019	65019C	65019-BL	65019-GR	250Kcmil-10 Sol/Str	11	14.17 [359.91]						
65020	65020C	65020-BL	65020-GR	250Kcmil-10 Sol/Str	12	15.26 [387.60]						
65020-13	65020C-13	65020-BL-13	65020-GR-13	250Kcmil-10 Sol/Str	13	16.35 [415.29]						
65020-14	65020C-14	65020-BL-14	65020-GR-14	250Kcmil-10 Sol/Str	14	17.45 [443.23]						

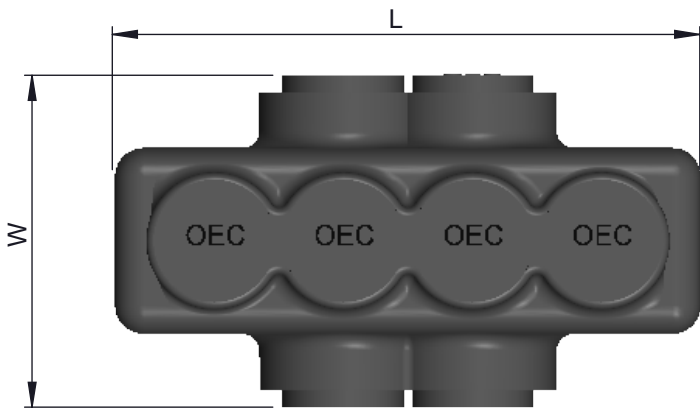

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : 250-10
600V 90°C AL9CU

cULus
LISTED
11 MB

		Tolerance			
		L	W	H	
		±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 106 Northford Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
		DRAWN	R.P.		18.03.25
		CHECK	S.P.		18.03.25
		APPROVED	M.K.		18.03.25
DWG. NO. OIM-0004		PROJECTION:  FIRST ANGLE  SIZE A3		TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting	
MATERIAL Refer Note					
FINISH Refer Note		Cat Id. 60006M - 65020-14 REV			
		DO NOT SCALE DRAWING SHEET 6 OF 10			