

F

E

D

C

B

A

F

E

D




C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H		
60007	60007C	60007-BL	60007-GR	350 Kcmil - 10 Sol/Str	02	2.37 [60.19]	2.75 [69.85]	2.40 [60.96]	5/16	275
63021	63021C	63021-BL	63021-GR	350 Kcmil - 10 Sol/Str	03	3.56 [90.42]				
63022	63022C	63022-BL	63022-GR	350 Kcmil - 10 Sol/Str	04	4.74 [120.39]				
63023	63023C	63023-BL	63023-GR	350 Kcmil - 10 Sol/Str	05	5.93 [150.62]				
63024	63024C	63024-BL	63024-GR	350 Kcmil - 10 Sol/Str	06	7.11 [180.59]				
63025	63025C	63025-BL	63025-GR	350 Kcmil - 10 Sol/Str	07	8.30 [210.82]				
63026	63026C	63026-BL	63026-GR	350 Kcmil - 10 Sol/Str	08	9.48 [240.79]				
63027	63027C	63027-BL	63027-GR	350 Kcmil - 10 Sol/Str	09	10.67 [271.01]				
63028	63028C	63028-BL	63028-GR	350 Kcmil - 10 Sol/Str	10	11.85 [300.99]				
63029	63029C	63029-BL	63029-GR	350 Kcmil - 10 Sol/Str	11	13.04 [331.21]				
63030	63030C	63030-BL	63030-GR	350 Kcmil - 10 Sol/Str	12	14.22 [361.18]				
63030-13	63030C-13	63030-BL-13	63030-GR-13	350 Kcmil - 10 Sol/Str	13	15.41 [391.41]				
630300-14	630300C-14	630300-BL-14	630300-GR-14	350 Kcmil - 10 Sol/Str	14	16.59 [421.38]				

- Note:
- Insulated With High Dieelectric Access Plastisol
 - Dual Rated For Copper And Aluminum Conductors
 - Wire Range: 750Kcmil-14
 - UL486 A/B Listed For Wire Connectors
 - Cold Temperature Rated Up To -45°C
 - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
 - Supplies With Removable Access Plugs
 - Black Insulation Is UV Resistant
 - Insulation UV Stablized & Listed To UL94 With V0 Flammability
 - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs
 - Standard Finish Black/Clear
 - Available In Colors : Black, Clear, Blue, Gray

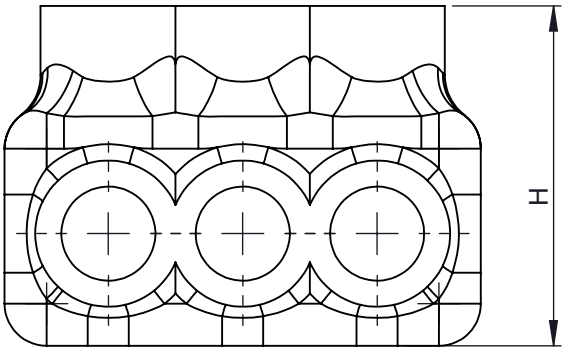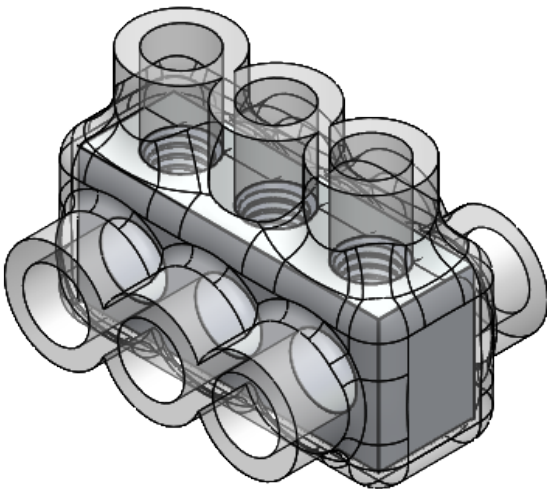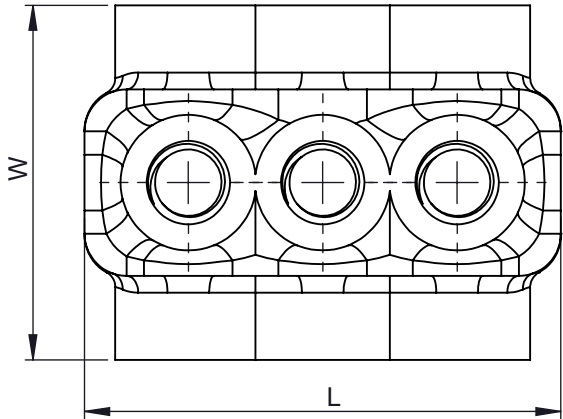

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±0.15 TRUE C.L. ±0.15 3 PL. DEC. ±0.15 ANGLES ±0.15	NAME	DATE	OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P.	
	CHECK	S.P.	
	APPROVED	M.K.	
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE	SIZE A3
MATERIAL Refer Note		TITLE: Insulated Multi-Tap Connectors Dual Sided Entry	
FINISH Refer Note		Cat Id. 60007 - 630300-14 REV	
		DO NOT SCALE DRAWING SHEET 7 OF 10	