Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60007A	60007AC	60007A-BL	60007A-GR	350 Kcmil - 10 Sol/Str	02	2.37 [60.19]	2.34 [59.43]	2.40 [60.96]	5/16"	275	1.50"
62049	62049C	62049-BL	62049-GR	350 Kcmil - 10 Sol/Str	03	3.56 [90.42]					
62050	62050C	62050-BL	62050-GR	350 Kcmil - 10 Sol/Str	04	4.74 [120.39]					
62051	62051C	62051-BL	62051-GR	350 Kcmil - 10 Sol/Str	05	5.93 [150.62]					
62052	62052C	62052-BL	62052-GR	350 Kcmil - 10 Sol/Str	06	7.11 [180.59]					
62053	62053C	62053-BL	62053-GR	350 Kcmil - 10 Sol/Str	07	8.30 [210.82]					
62054	62054C	62054-BL	62054-GR	350 Kcmil - 10 Sol/Str	08	9.48 [240.79]					
62055	62055C	62055-BL	62055-GR	350 Kcmil - 10 Sol/Str	09	10.67 [271.01]					
62056	62056C	62056-BL	62056-GR	350 Kcmil - 10 Sol/Str	10	11.85 [300.99]					
62057	62057C	62057-BL	62057-GR	350 Kcmil - 10 Sol/Str	11	13.04 [331.21]					
62058	62058C	62058-BL	62058-GR	350 Kcmil - 10 Sol/Str	12	14.22 [361.18]					
62059	62059C	62059-BL	62059-GR	350 Kcmil - 10 Sol/Str	13	15.41 [391.41]					
62060	62060C	62060-BL	62060-GR	350 Kcmil - 10 Sol/Str	14	16.59 [421.38]					

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

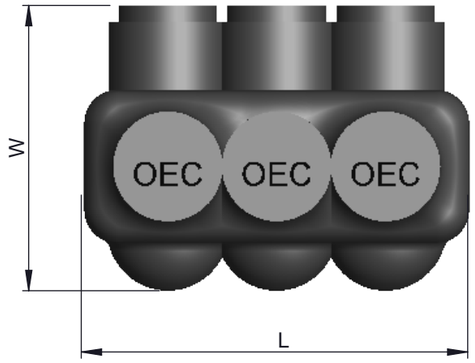

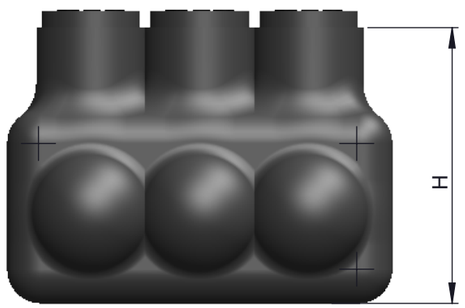

Marking

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : 350-10
600V 90˚C AL9CU

cULus
LISTED
11 MB

Tolerance		
L	W	H
±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

	NAME	DATE
DRAWN	R.P	13.03.25
CHECK	S.P.	13.03.25
APPROVED	M.K.	13.03.25

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0001
PROJECTION: FIRST ANGLE
SIZE A3

TITLE: Insulated Multi-Tap Connectors Single Sided Entry

MATERIAL Refer Note
FINISH Refer Note

Cat Id. 60007A - 62060
REV
DO NOT SCALE DRAWING
SHEET 7 OF 10

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT