

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60007AM	60007AMC	60007AM-BL	60007AM-GR	350Kcmil-10 Sol/Str	02	4.74 [120.39]	2.34 [59.43]	2.40 [60.96]	5/16	275	
64049	64049C	64049-BL	64049-GR	350Kcmil-10 Sol/Str	03	5.93 [150.62]					
64050	64050C	64050-BL	64050-GR	350Kcmil-10 Sol/Str	04	7.11 [180.59]					
64051	64051C	64051-BL	64051-GR	350Kcmil-10 Sol/Str	05	8.30 [210.82]					
64052	64052C	64052-BL	64052-GR	350Kcmil-10 Sol/Str	06	9.48 [240.79]					
64053	64053C	64053-BL	64053-GR	350Kcmil-10 Sol/Str	07	10.67 [271.01]					
64054	64054C	64054-BL	64054-GR	350Kcmil-10 Sol/Str	08	11.85 [300.99]					
64055	64055C	64055-BL	64055-GR	350Kcmil-10 Sol/Str	09	13.04 [331.21]					
64056	64056C	64056-BL	64056-GR	350Kcmil-10 Sol/Str	10	14.22 [361.18]					
64057	64057C	64057-BL	64057-GR	350Kcmil-10 Sol/Str	11	15.41 [391.41]					
64058	64058C	64058-BL	64058-GR	350Kcmil-10 Sol/Str	12	16.59 [421.38]					
62059	62059C	62059-BL	62059-GR	350Kcmil-10 Sol/Str	13	17.78 [451.61]					
62060	62060C	62060-BL	62060-GR	350Kcmil-10 Sol/Str	14	18.96 [481.58]					

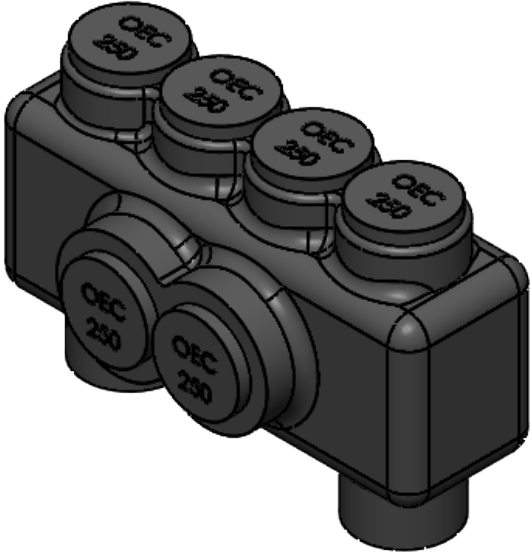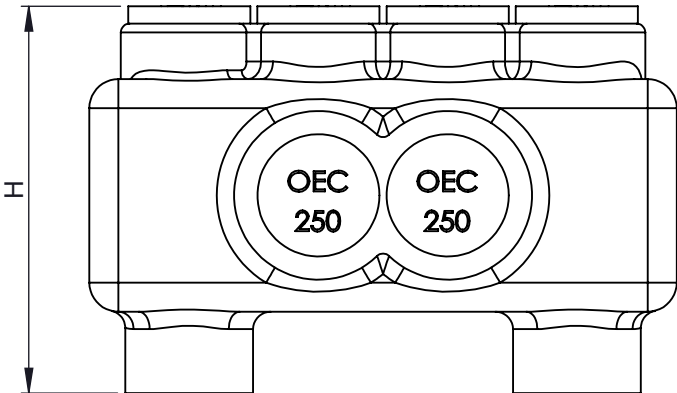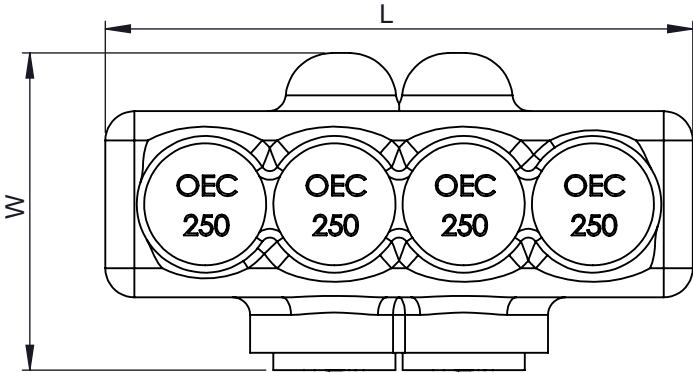

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

		Tolerance		
		L	W	H
		±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P	15.03.25	
	CHECK	S.P.	15.03.25	
	APPROVED	M.K.	15.03.25	
DWG. NO. OIM-0003		PROJECTION: FIRST ANGLE	SIZE A3	TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting
MATERIAL Refer Note				
FINISH Refer Note		Cat Id. 60007AM - 64060 REV		
		DO NOT SCALE DRAWING SHEET 7 OF 10		