

F

E

D

C

B

A

F

E



D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60007M	60007MC	60007M-BL	60007M-GR	350Kcmil-10 Sol/Str	02	4.74 [120.39]	2.75 [69.85]	2.40 [60.96]	5/16"	275	1.50"	
65021	65021C	65021-BL	65021-GR	350Kcmil-10 Sol/Str	03	5.93 [150.62]						
65022	65022C	65022-BL	65022-GR	350Kcmil-10 Sol/Str	04	7.11 [180.59]						
65023	65023C	65023-BL	65023-GR	350Kcmil-10 Sol/Str	05	8.30 [210.82]						
65024	65024C	65024-BL	65024-GR	350Kcmil-10 Sol/Str	06	9.48 [240.79]						
65025	65025C	65025-BL	65025-GR	350Kcmil-10 Sol/Str	07	10.67 [271.01]						
65026	65026C	65026-BL	65026-GR	350Kcmil-10 Sol/Str	08	11.85 [300.99]						
65027	65027C	65027-BL	65027-GR	350Kcmil-10 Sol/Str	09	13.04 [331.21]						
65028	65028C	65028-BL	65028-GR	350Kcmil-10 Sol/Str	10	14.22 [361.18]						
65029	65029C	65029-BL	65029-GR	350Kcmil-10 Sol/Str	11	15.41 [391.41]						
65030	65030C	65030-BL	65030-GR	350Kcmil-10 Sol/Str	12	16.59 [421.38]						
65030-13	65030C-13	65030-BL-13	65030-GR-13	350Kcmil-10 Sol/Str	13	17.80 [452.12]						
65030-14	65030C-14	65030-BL-14	65030-GR-14	350Kcmil-10 Sol/Str	14	19.60 [497.84]						

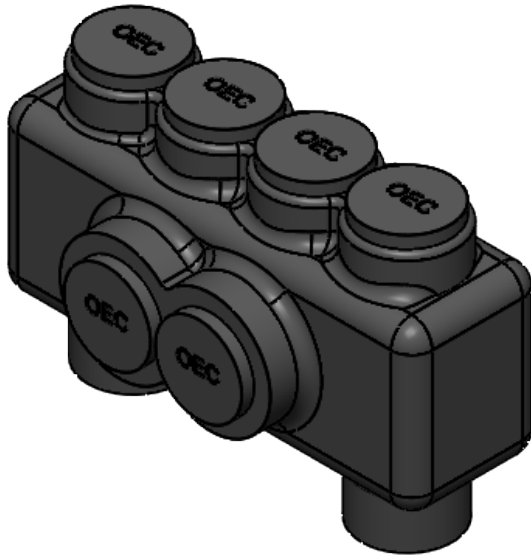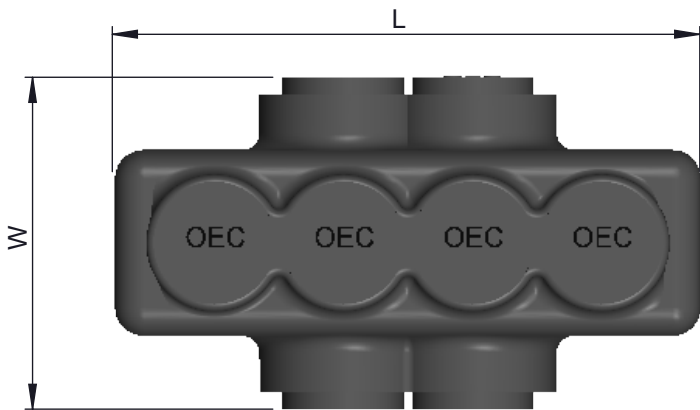

Marking

OEC

Wire Connector

Catlog ID : XXXXX

Wire Range : 350-10

600V 90°C AL9CU

cULus
LISTED
11 MB

				Tolerance		
				L	W	H
				±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015				NAME	DATE	
				DRAWN	R.P.	18.03.25
				CHECK	S.P.	18.03.25
				APPROVED	M.K.	18.03.25
DWG. NO. OIM-0004		PROJECTION: FIRST ANGLE		  SIZE A3		
MATERIAL		Refer Note		OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting		
FINISH		Refer Note				
				Cat Id. 60007M - 65030-14		REV
				DO NOT SCALE DRAWING		SHEET 7 OF 10