

F

E

D

C

B

A

F

E

D




C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H		
60008	60008C	60008-BL	60008-GR	500 Kcmil - 6 Str	02	2.80 [71.12]	3.00 [76.20]	2.90 [73.66]	5/16	310
63031	63031C	63031-BL	63031-GR	500 Kcmil - 6 Str	03	4.20 [106.68]				
63032	63032C	63032-BL	63032-GR	500 Kcmil - 6 Str	04	5.60 [142.24]				
63033	63033C	63033-BL	63033-GR	500 Kcmil - 6 Str	05	7.00 [177.80]				
63034	63034C	63034-BL	63034-GR	500 Kcmil - 6 Str	06	8.40 [213.36]				
63035	63035C	63035-BL	63035-GR	500 Kcmil - 6 Str	07	9.80 [248.92]				
63036	63036C	63036-BL	63036-GR	500 Kcmil - 6 Str	08	11.20 [284.48]				
63037	63037C	63037-BL	63037-GR	500 Kcmil - 6 Str	09	12.60 [320.04]				
63038	63038C	63038-BL	63038-GR	500 Kcmil - 6 Str	10	14.00 [355.60]				
63039	63039C	63039-BL	63039-GR	500 Kcmil - 6 Str	11	15.40 [391.16]				
63040	63040C	63040-BL	63040-GR	500 Kcmil - 6 Str	12	16.80 [426.72]				
63040-13	63040C-13	63040-BL-13	63040-GR-13	500 Kcmil - 6 Str	13	18.20 [462.28]				
63040-14	63040C-14	63040-BL-14	63040-GR-14	500 Kcmil - 6 Str	14	19.60 [497.84]				

- Note:
- Insulated With High Dieelectric Access Plastisol
 - Dual Rated For Copper And Aluminum Conductors
 - Wire Range: 750Kcmil-14
 - UL486 A/B Listed For Wire Connectors
 - Cold Temperature Rated Up To -45°C
 - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
 - Supplies With Removable Access Plugs
 - Black Insulation Is UV Resistant
 - Insulation UV Stablized & Listed To UL94 With V0 Flammability
 - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs
 - Standard Finish Black/Clear
 - Available In Colors : Black, Clear, Blue, Gray

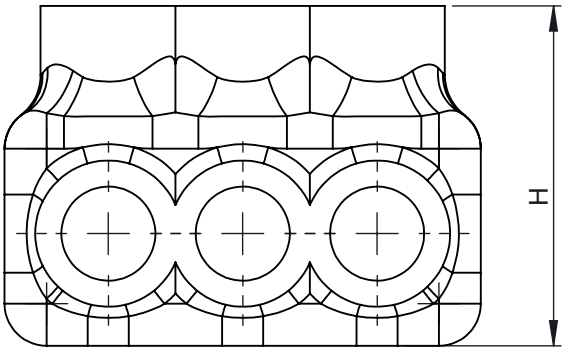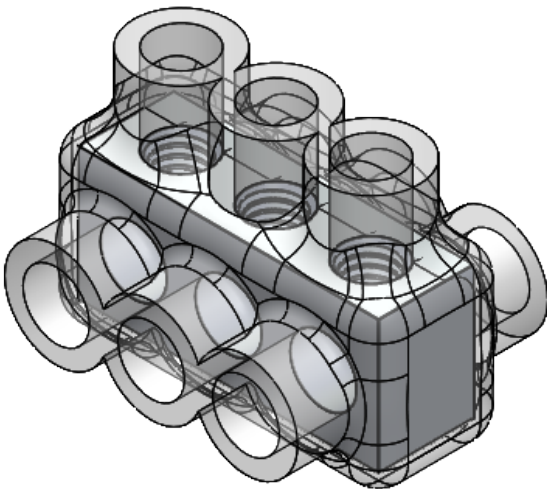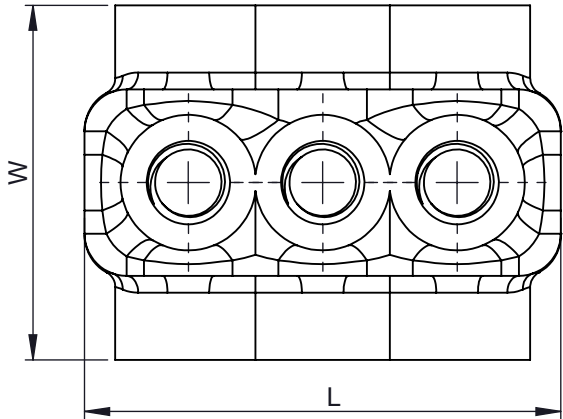

Tolerance		
L	W	H
±0.50	±0.50	±1.0

TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±015 TRUE C.L. ±015 3 PL. DEC. ±015 ANGLES ±015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com	
	DRAWN	R.P.	15.03.25		
	CHECK	S.P.	15.03.25		
	APPROVED	M.K.	15.03.25		
DWG. NO. OIM-0002	PROJECTION: 	FIRST ANGLE 	SIZE A3	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry	
MATERIAL Refer Note					
FINISH Refer Note					
				Cat Id. 60008 - 63040-14	REV
				DO NOT SCALE DRAWING	SHEET 8 OF 10