| Catalog Id | | | | Wire Range | No. of Port | Dimensions | | | Screw Hex Size | Torque (In-lbs) | Strip Length |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Part No. | Part No.(Clear) | Part No.(Blue) | Part No.(Gray) | | | L | W | H | | | |
| 60008A | 60008AC | 60008A-BL | 60008A-GR | 500 Kcmil - 6 Str | 02 | 2.80 [71.12] | 2.55 [64.77] | 2.90 [73.66] | 5/16" | 310 | 1-1/2" |
| 62061 | 62061C | 62061-BL | 62061-GR | 500 Kcmil - 6 Str | 03 | 4.20 [106.68] | | | | | |
| 62062 | 62062C | 62062-BL | 62062-GR | 500 Kcmil - 6 Str | 04 | 5.60 [142.24] | | | | | |
| 62063 | 62063C | 62063-BL | 62063-GR | 500 Kcmil - 6 Str | 05 | 7.00 [177.80] | | | | | |
| 62064 | 62064C | 62064-BL | 62064-GR | 500 Kcmil - 6 Str | 06 | 8.40 [213.36] | | | | | |
| 62065 | 62065C | 62065-BL | 62065-GR | 500 Kcmil - 6 Str | 07 | 9.80 [248.92] | | | | | |
| 62066 | 62066C | 62066-BL | 62066-GR | 500 Kcmil - 6 Str | 08 | 11.20 [284.48] | | | | | |
| 62067 | 62067C | 62067-BL | 62067-GR | 500 Kcmil - 6 Str | 09 | 12.60 [320.04] | | | | | |
| 62068 | 62068C | 62068-BL | 62068-GR | 500 Kcmil - 6 Str | 10 | 14.00 [355.60] | | | | | |
| 62069 | 62069C | 62069-BL | 62069-GR | 500 Kcmil - 6 Str | 11 | 15.40 [391.16] | | | | | |
| 62070 | 62070C | 62070-BL | 62070-GR | 500 Kcmil - 6 Str | 12 | 16.80 [426.72] | | | | | |
| 62071 | 62071C | 62071-BL | 62071-GR | 500 Kcmil - 6 Str | 13 | 18.20 [462.28] | | | | | |
| 62072 | 62072C | 62072-BL | 62072-GR | 500 Kcmil - 6 Str | 14 | 19.60 [497.84] | | | | | |

Note:

- Insulated With High Dieelectric Access Plastisol
- Dual Rated For Copper And Aluminum Conductors
- Wire Range: 750Kcmil-14
- UL486 A/B Listed For Wire Connectors
- Cold Temperature Rated Up To -45˚C
- Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
- Supplies With Removable Access Plugs
- Black Insulation Is UV Resistant
- Insulation UV Stablized & Listed To UL94 With V0 Flammability
- Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs
- Standard Finish Black/Clear
- Available In Colors : Black, Clear, Blue, Gray
- Dimension In Brackets [ ] Are In Millimeters

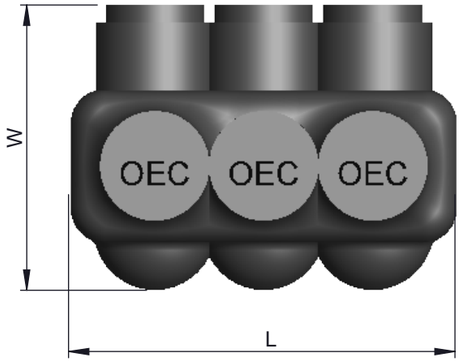

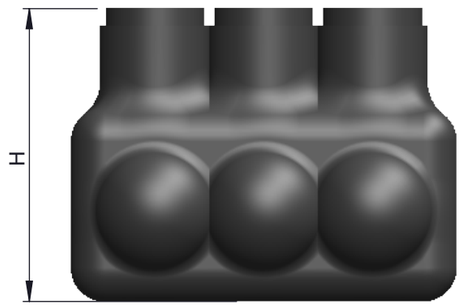

**Marking**

OEC
Wire Connector
Catlog ID : XXXXX
Wire Range : 500-6
600V 90˚C AL9CU

cULus
LISTED
11 MB

| | Tolerance | | |
|---|---|---|---|
| | L | W | H |
| | ±0.50 | ±0.50 | ±1.0 |

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

| | NAME | DATE |
|---|---|---|
| DRAWN | R.P | 13.03.25 |
| CHECK | S.P. | 13.03.25 |
| APPROVED | M.K. | 13.03.25 |

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OIM-0001

PROJECTION: FIRST ANGLE

SIZE A3

TITLE: Insulated Multi-Tap Connectors Single Sided Entry

MATERIAL Refer Note

FINISH Refer Note

Cat Id. 60008A - 62072

REV

DO NOT SCALE DRAWING



THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT