

F

E

D

C

B

A

F

E


D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60008AM	60008AMC	60008AM-BL	60008AM-GR	500Kcmil-6 Str	02	5.60 [142.24]	3.00 [76.20]	2.90 [73.66]	5/16"	310	1-1/2"	
65031	65031C	65031-BL	65031-GR	500Kcmil-6 Str	03	7.00 [177.80]						
65032	65032C	65032-BL	65032-GR	500Kcmil-6 Str	04	8.40 [213.36]						
65033	65033C	65033-BL	65033-GR	500Kcmil-6 Str	05	9.80 [248.92]						
65034	65034C	65034-BL	65034-GR	500Kcmil-6 Str	06	11.20 [284.48]						
65035	65035C	65035-BL	65035-GR	500Kcmil-6 Str	07	12.60 [320.04]						
65036	65036C	65036-BL	65036-GR	500Kcmil-6 Str	08	14.00 [355.60]						
65037	65037C	65037-BL	65037-GR	500Kcmil-6 Str	09	15.40 [391.16]						
65038	65038C	65038-BL	65038-GR	500Kcmil-6 Str	10	16.80 [426.72]						
65039	65039C	65039-BL	65039-GR	500Kcmil-6 Str	11	18.20 [462.28]						
65040	65040C	65040-BL	65040-GR	500Kcmil-6 Str	12	19.60 [497.84]						
65040-13	65040C-13	65040-BL-13	65040-GR-13	500Kcmil-6 Str	13	21.00 [533.40]						
65040-14	65040C-14	65040-BL-14	65040-GR-14	500Kcmil-6 Str	14	22.40 [568.96]						

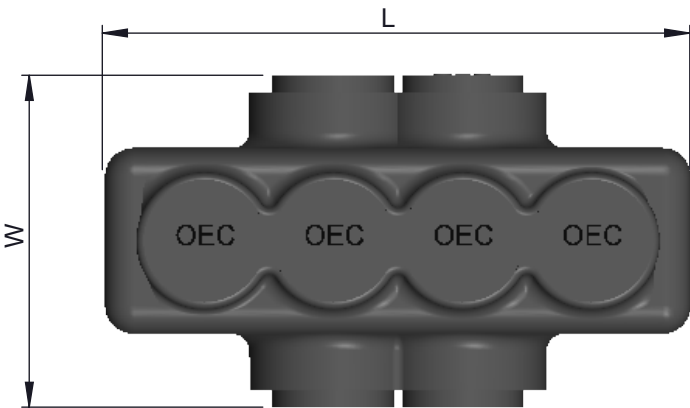

Marking

OEC

Wire Connector
Catlog ID : XXXXX
Wire Range : 500-6
600V 90°C AL9CU

cULus
LISTED
11 MB

			Tolerance			
			L	W	H	
			±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
		DRAWN	R.P			18.03.25
		CHECK	S.P.			18.03.25
		APPROVED	M.K.			18.03.25
DWG. NO. OIM-0004		PROJECTION:	FIRST ANGLE	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting		
						SIZE A3
MATERIAL		Refer Note				
FINISH		Refer Note				
					Cat Id. 60008AM - 65040-14	
					DO NOT SCALE DRAWING	
					REV	
					SHEET 8 OF 10	