

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60009A	60009AC	60009A-BL	60009A-GR	600 Kcmil - 6 Str	02	2.80 [71.12]	3.00 [76.20]	2.90 [73.66]	5/16	443	
63041B	63041BC	63041B-BL	63041B-GR	600 Kcmil - 6 Str	03	4.20 [106.68]					
63042B	63042BC	63042B-BL	63042B-GR	600 Kcmil - 6 Str	04	5.60 [142.24]					
63043B	63043BC	63043B-BL	63043B-GR	600 Kcmil - 6 Str	05	7.00 [177.80]					
63044B	63044BC	63044B-BL	63044B-GR	600 Kcmil - 6 Str	06	8.40 [213.36]					
63045B	63045BC	63045B-BL	63045B-GR	600 Kcmil - 6 Str	07	9.80 [248.92]					
63046B	63046BC	63046B-BL	63046B-GR	600 Kcmil - 6 Str	08	11.20 [284.48]					
63047B	63047BC	63047B-BL	63047B-GR	600 Kcmil - 6 Str	09	12.60 [320.04]					
63048B	63048BC	63048B-BL	63048B-GR	600 Kcmil - 6 Str	10	14.00 [355.60]					
63049B	63049BC	63049B-BL	63049B-GR	600 Kcmil - 6 Str	11	15.40 [391.16]					
63050B	63050BC	63050B-BL	63050B-GR	600 Kcmil - 6 Str	12	16.80 [426.72]					
63050B-13	63050BC-13	63050B-BL-13	63050B-GR-13	600 Kcmil - 6 Str	13	18.20 [462.28]					
63050B-14	63050BC-14	63050B-BL-14	63050B-GR-14	600 Kcmil - 6 Str	14	19.60 [497.84]					

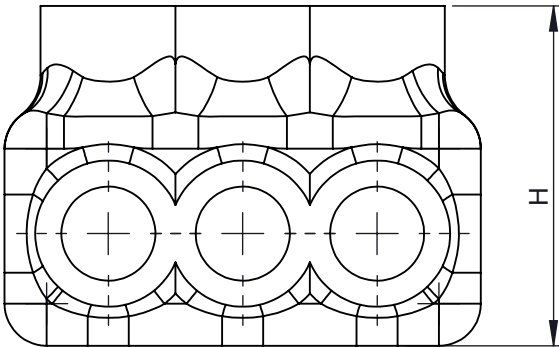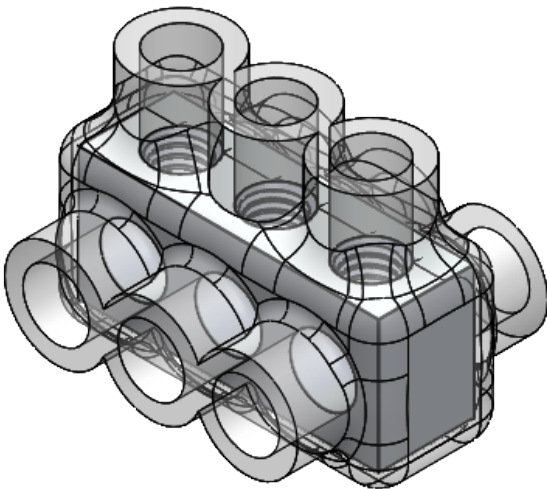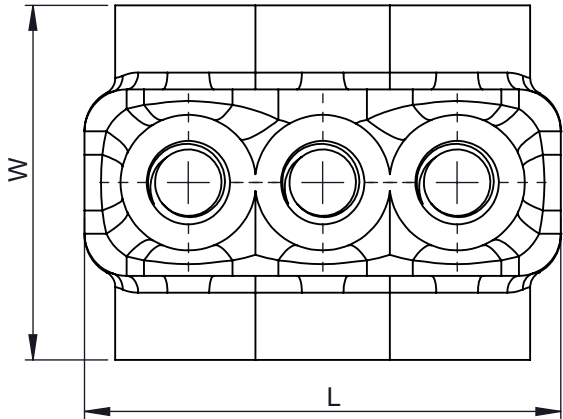

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

			Tolerance			
			L	W	H	
			±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±0.15 TRUE C.L. ±0.15 3 PL. DEC. ±0.15 ANGLES ±0.15		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
		DRAWN	R.P.			15.03.25
		CHECK	S.P.			15.03.25
		APPROVED	M.K.			15.03.25
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE  		SIZE A3	TITLE: Insulated Multi-Tap Connectors Dual Sided Entry	
MATERIAL Refer Note						
FINISH Refer Note						
Cat Id. 60009A - 63050B-14					REV	
DO NOT SCALE DRAWING					SHEET 9 OF 10	