

F

E

D

C

B

A

F

E




D

C


B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60009AM	60009AMC	60009AM-BL	60009AM-GR	600Kcmil-6 Str	02	5.60 [142.24]	2.55 [64.77]	2.90 [73.66]	5/16	443	
64073A	64073AC	64073A-BL	64073A-GR	600Kcmil-6 Str	03	7.00 [177.80]					
64074A	64074AC	64074A-BL	64074A-GR	600Kcmil-6 Str	04	8.40 [213.36]					
64075A	64075AC	64075A-BL	64075A-GR	600Kcmil-6 Str	05	9.80 [248.92]					
64076A	64076AC	64076A-BL	64076A-GR	600Kcmil-6 Str	06	11.20 [284.48]					
64077A	64077AC	64077A-BL	64077A-GR	600Kcmil-6 Str	07	12.60 [320.04]					
64078A	64078AC	64078A-BL	64078A-GR	600Kcmil-6 Str	08	14.00 [355.60]					
64079A	64079AC	64079A-BL	64079A-GR	600Kcmil-6 Str	09	15.40 [391.16]					
64080A	64080AC	64080A-BL	64080A-GR	600Kcmil-6 Str	10	16.80 [426.72]					
64081A	64081AC	64081A-BL	64081A-GR	600Kcmil-6 Str	11	18.20 [462.28]					
64082A	64082AC	64082A-BL	64082A-GR	600Kcmil-6 Str	12	19.60 [497.84]					
62083A	62083AC	62083A-BL	62083A-GR	600Kcmil-6 Str	13	21.00 [533.40]					
62084A	62084AC	62084A-BL	62084A-GR	600Kcmil-6 Str	14	22.40 [568.96]					

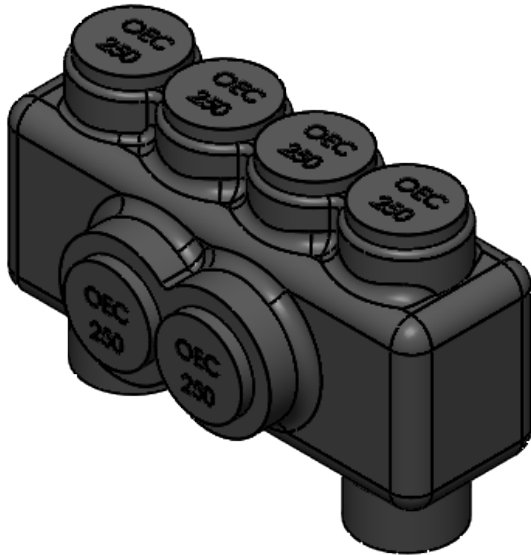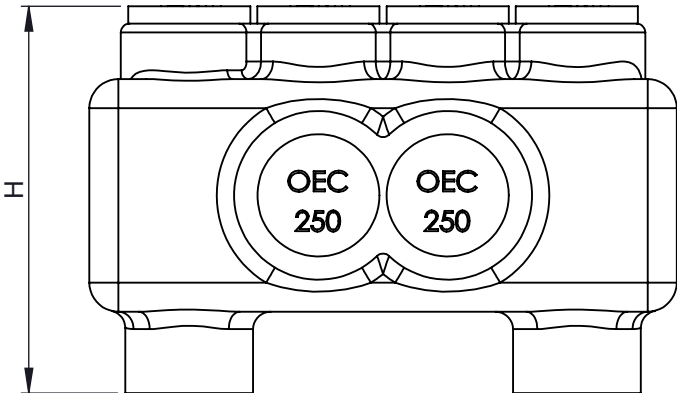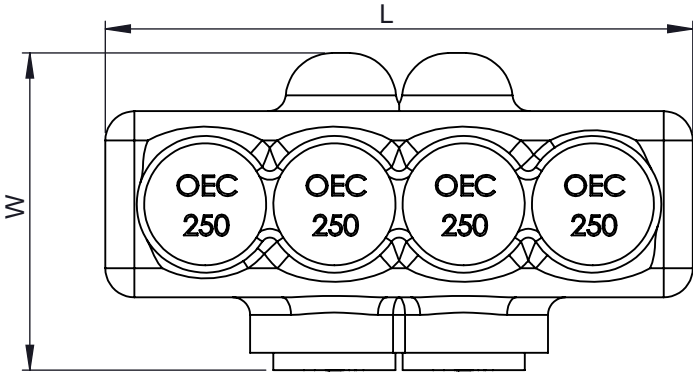

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

				Tolerance		
				L	W	H
				±0.50		±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
	DRAWN	R.P	15.03.25			
	CHECK	S.P.	15.03.25			
	APPROVED	M.K.	15.03.25			
DWG. NO. OIM-0003	PROJECTION:	FIRST ANGLE	SIZE A3	TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting		
						
MATERIAL Refer Note				Cat Id. 60009BM - 62084A REV DO NOT SCALE DRAWING SHEET 9 OF 10		
FINISH Refer Note						