

F

E

D

C

B

A

F

E


D

C


B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: • Insulated With High Dieelectric Access Plastisol • Dual Rated For Copper And Aluminum Conductors • Wire Range: 750Kcmil-14 • UL486 A/B Listed For Wire Connectors • Cold Temperature Rated Up To -45 °C • Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area • Supplies With Removable Access Plugs • Black Insulation Is UV Resistant • Insulation UV Stablized & Listed To UL94 With V0 Flammability • Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs • Standard Finish Black/Clear • Available In Colors : Black, Clear, Blue, Gray • Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60009B	60009BC	60009B-BL	60009B-GR	600 Kcmil - 6 Str	02	2.80 [71.12]	2.55 [64.77]	2.90 [73.66]	5/16"	443	2"	
62073A	62073AC	62073A-BL	62073A-GR	600 Kcmil - 6 Str	03	4.20 [106.68]						
62074A	62074AC	62074A-BL	62074A-GR	600 Kcmil - 6 Str	04	5.60 [142.24]						
62075A	62075AC	62075A-BL	62075A-GR	600 Kcmil - 6 Str	05	7.00 [177.80]						
62076A	62076AC	62076A-BL	62076A-GR	600 Kcmil - 6 Str	06	8.40 [213.36]						
62077A	62077AC	62077A-BL	62077A-GR	600 Kcmil - 6 Str	07	9.80 [248.92]						
62078A	62078AC	62078A-BL	62078A-GR	600 Kcmil - 6 Str	08	11.20 [284.48]						
62079A	62079AC	62079A-BL	62079A-GR	600 Kcmil - 6 Str	09	12.60 [320.04]						
62080A	62080AC	62080A-BL	62080A-GR	600 Kcmil - 6 Str	10	14.00 [355.60]						
62081A	62081AC	62081A-BL	62081A-GR	600 Kcmil - 6 Str	11	15.40 [391.16]						
62082A	62082AC	62082A-BL	62082A-GR	600 Kcmil - 6 Str	12	16.80 [426.72]						
62083A	62083AC	62083A-BL	62083A-GR	600 Kcmil - 6 Str	13	18.20 [462.28]						
62084A	62084AC	62084A-BL	62084A-GR	600 Kcmil - 6 Str	14	19.60 [497.84]						

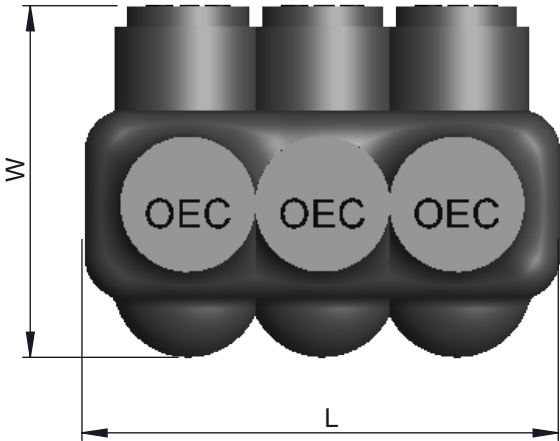

Marking

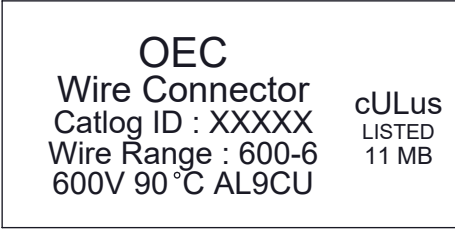

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED		NAME	DATE
2 PL. DEC. ±015 TRUE C.L. ±015		DRAWN R.P.	13.03.25
3 PL. DEC. ±015 ANGLES ±015		CHECK S.P.	13.03.25
		APPROVED M.K.	13.03.25
DWG. NO. OIM-0001		PROJECTION: FIRST ANGLE	SIZE A3
MATERIAL Refer Note		TITLE: Insulated Multi-Tap Connectors Single Sided Entry	
FINISH Refer Note		Cat Id. 60009B - 62084A	
		DO NOT SCALE DRAWING	
		SHEET 9 OF 10	