

F

E

D

C

B

A

F

E



D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Screw Hex Size	Torque (In-lbs)	Strip Length	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray - Dimension In Brackets [] Are In Millimeters
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H				
60009BM	60009BMC	60009BM-BL	60009BM-GR	600Kcmil-6 Str	02	5.60 [142.24]	3.00 [76.20]	2.90 [73.66]	5/16"	443	2.00"	
65041B	65041BC	65041B-BL	65041B-GR	600Kcmil-6 Str	03	7.00 [177.80]						
65042B	65042BC	65042B-BL	65042B-GR	600Kcmil-6 Str	04	8.40 [213.36]						
65043B	65043BC	65043B-BL	65043B-GR	600Kcmil-6 Str	05	9.80 [248.92]						
65044B	65044BC	65044B-BL	65044B-GR	600Kcmil-6 Str	06	11.20 [284.48]						
65045B	65045BC	65045B-BL	65045B-GR	600Kcmil-6 Str	07	12.60 [320.04]						
65046B	65046BC	65046B-BL	65046B-GR	600Kcmil-6 Str	08	14.00 [355.60]						
65047B	65047BC	65047B-BL	65047B-GR	600Kcmil-6 Str	09	15.40 [391.16]						
65048B	65048BC	65048B-BL	65048B-GR	600Kcmil-6 Str	10	16.80 [426.72]						
65049B	65049BC	65049B-BL	65049B-GR	600Kcmil-6 Str	11	18.20 [462.28]						
65050B	65050BC	65050B-BL	65050B-GR	600Kcmil-6 Str	12	19.60 [497.84]						
65050B-13	65050BC-13	65050B-BL-13	65050B-GR-13	600Kcmil-6 Str	13	21.00 [533.40]						
65050B-14	65050BC-14	65050B-BL-14	65050B-GR-14	600Kcmil-6 Str	14	22.40 [568.96]						

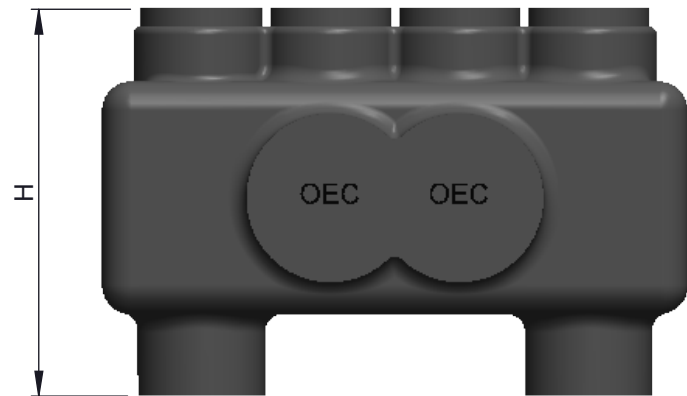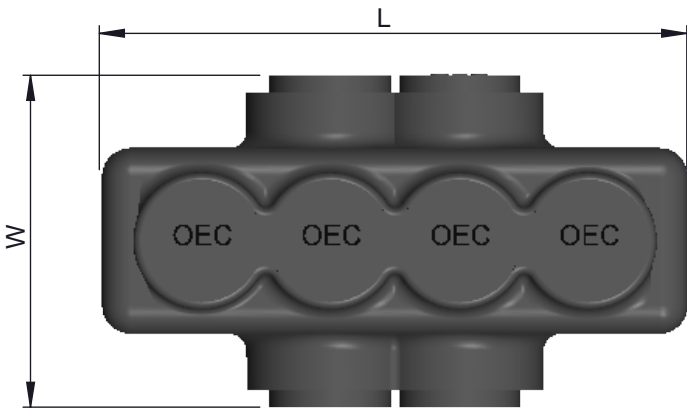

Marking

OEC

Wire Connector

Catlog ID : XXXXX

Wire Range : 600-6

600V 90°C AL9CU

cULus
LISTED
11 MB

				Tolerance		
				L	W	H
				±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015				NAME	DATE	
		DRAWN		R.P.	18.03.25	
		CHECK		S.P.	18.03.25	
		APPROVED		M.K.	18.03.25	
				OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
DWG. NO. OIM-0004		PROJECTION: FIRST ANGLE				
MATERIAL Refer Note		  SIZE A3				
FINISH Refer Note						
				TITLE: Insulated Multi-Tap Connectors Dual Sided Entry With Mounting		
				Cat Id. 60009BM - 65050B-14 REV		
				DO NOT SCALE DRAWING SHEET 9 OF 10		