

F

E

D

C

B

A

F

E

D



C

B

A

| Catalog Id | | | | Wire Range | No. of Port | Dimensions | | | Screw Hex Size | Torque (In-lbs) | Strip Length |
|------------|-----------------|----------------|----------------|-------------------|-------------|------------------|-----------------|-----------------|----------------|-----------------|--------------|
| Part No. | Part No.(Clear) | Part No.(Blue) | Part No.(Gray) | | | L | W | H | | | |
| 61005 | 61005C | 61005-BL | 61005-GR | 750 Kcmil - 2 Str | 02 | 6.50 [165.10] | 2.75 [69.85] | 2.64 [67.05] | 3/8" | 443 | 2.00" |

- Note:
- Insulated With High Dieelectric Access Plastisol
 - Dual Rated For Copper And Aluminum Conductors
 - Wire Range: 750Kcmil-14
 - Cold Temperature Rated Up To -45°C
 - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area
 - Supplies With Removable Access Plugs
 - Black Insulation Is UV Resistant
 - Insulation UV Stablized & Listed To UL94 With V0 Flammability
 - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs
 - Standard Finish Black/Clear
 - Available In Colors : Black, Clear, Blue, Gray

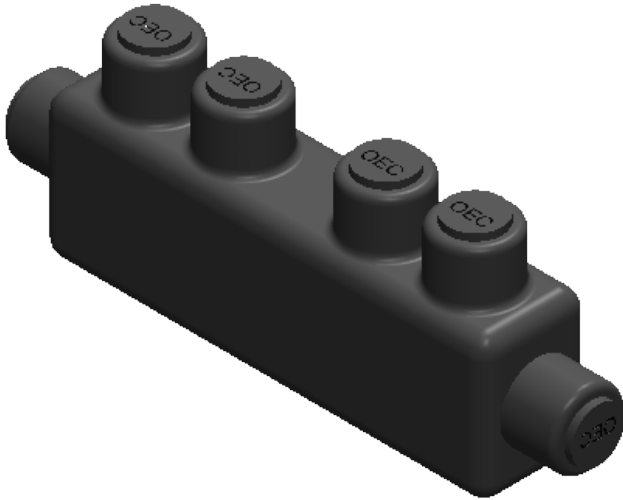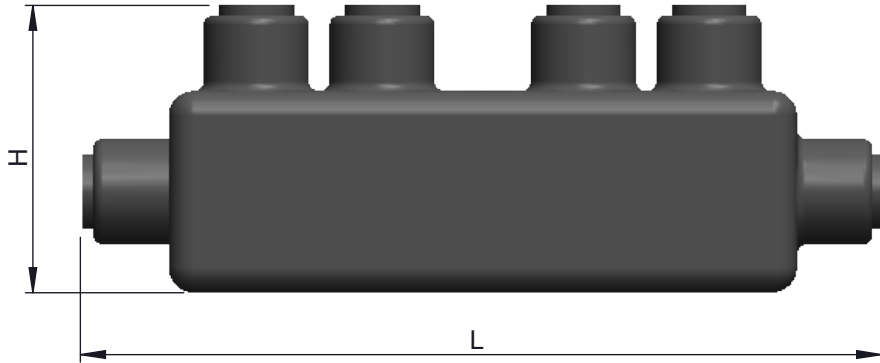

Marking

OEC

Wire Connector



Catlog ID : XXXXX

Wire Range : 750 - 2

600V 90°C AL9CU

cULus
LISTED
11 MB

| Tolerance | | |
|-----------|-------|------|
| L | W | H |
| ±0.50 | ±0.50 | ±1.0 |

| | | | | | | | | |
|--|--|-------------|-------------|---|---|--|------------------|-----|
| TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015 | | | NAME | DATE | <div> Usa Inc.</div> <div>106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com</div> | | | |
| | | DRAWN | R.P | 18.03.25 | | | | |
| | | CHECK | S.P. | 18.03.25 | | | | |
| | | APPROVED | M.K. | 18.03.25 | | | | |
| | | | | | | | | |
| DWG. NO. OIM-0006 | | PROJECTION: | FIRST ANGLE |  | SIZE A3 | TITLE: Insulated Inline Splice Double Stud | | |
| MATERIAL Refer Note | | | | | | | | |
| FINISH Refer Note | | | | | | | Cat Id. 61005 | REV |
| | | | | | | | | |
| | | | | | | DO NOT SCALE DRAWING | SHEET 1 OF 1 | |