

Compression Connector, H-Tap

Features

- Pre filled with anti oxidant
- Compact size allows for easy taping and insulation of connection
- UL467 Listed for lightning protection
- Applicable for direct burial
- Allows for 2 continuous parallel conductor

Standard Material



- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

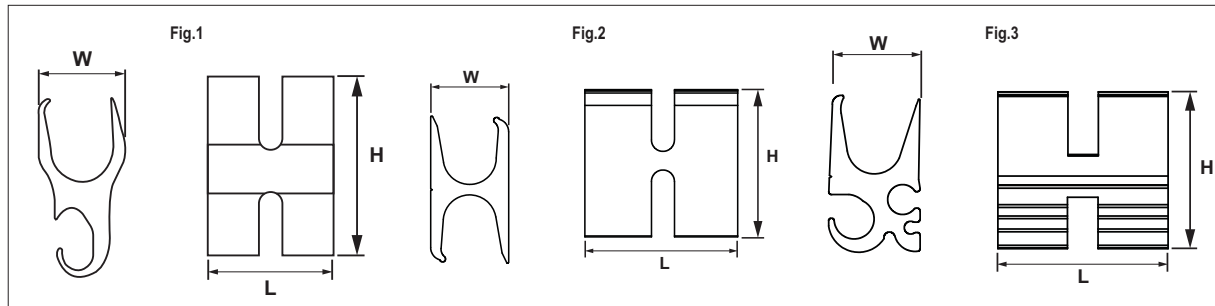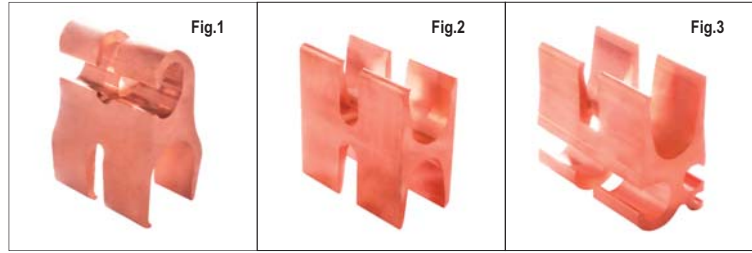

Catalog ID	Fig. No	Conductor Range				Ground Rebar	Ground Rod	Crimping Tool	Strip Length	Dimensions In Inches		
		Main	Tap-1	Tap-2	Tap-3					L	W	H
23191	1	6-2 Str	250 Kcmil-2 Str	-	-	#9 - #8	1	Bumdy-Y46	4	2.44	1.70	3.30
23192	2	500-350 Kcmil	500-350 Kcmil	-	-	-			3.5	2.94	1.50	2.97
23193	3	500-350 Kcmil	4/0-1/0 Str	1-6 str	2-14 Str	#6			3.5	2.34	1.50	2.97
23194	2	400-250 Kcmil	400 Kcmil-4/0 Str	-	-	#6	3/4		3	2.44	1.15	2.43
23195	3	400 Kcmil-4/0 Str	3/0-1/0 Str	1-4 Str	8-14 Str	#6			3	2.44	1.30	2.18

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Stacking Adapter for Compression Lug

Features

- Electro-tin plated
- Manufactured from high strength aluminum alloy
- Two sizes cover a wire range
- Provides low contact resistance
- Applicable for dual rated

Standard Material


- Aluminum 6061-T6

Standard Finish

- Electro-tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

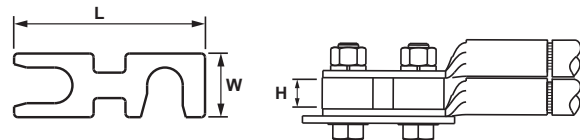

Catalog ID	Compression Terminal Conductor Range CU or AL	Dimensions In Inches		
		L	W	H
OSA250	1/0-250 Kcmil	3.00	1.00	0.77
OSA800	1/0-800 Kcmil	3.00	1.00	1.13
OSA1000	1/0-1000 Kcmil	3.00	1.25	1.25

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)