
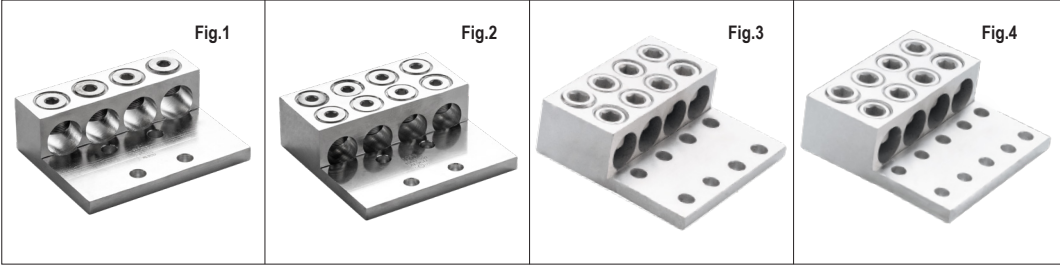


Aluminum, Mechanical Lug, Four Conductor Dual Rated (AL9CU)

- Features**
- Manufactured from high strength aluminum alloy
 - Chamfered entry
 - Electro-Tin plated for corrosion resistance
 - UL486A/B Listed for Wire Connectors
 - CSA certified to standard 22.2
 - Suitable for use with either copper or aluminum conductors
 - Provides low contact resistance
 - Provides ease of installation
- Standard Material**
- Aluminum
- Standard Finish**
- Electro-tin plated
- Electrical Rating**
- Voltage Rating: 600 V
 - Maximum Circuit Rating: 35 kV
 - Temperature Rating: 90°C
- We Supply**
- Suffix "-1/4", "-5/16", "-3/8", "-1/2", "-5/8", for special mounting stud holes.

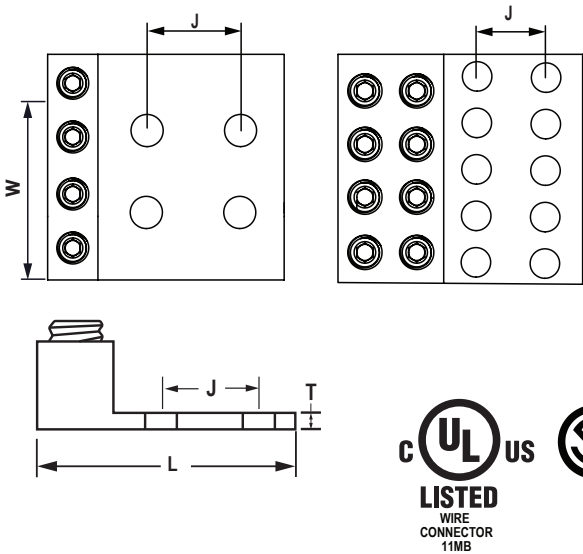

For Aluminum and Copper Conductors

Catalog ID	Fig. No.	Conductor Range	Stud Size	Dimensions In Inches					Torque	Wrench Style	Torque in (lbs)
				L	W	H	T	J			
99038	1	250-6	1/2	4.13	3.74	1.25	0.31	1.75	As per UL 486 A/B Table Number 21	⬡	225
99039		350-6		4.13	3.94	1.25	0.31	1.75		⬡	225
99041		1000-300		6.00	5.75	1.25	0.50	1.75		⬡	600
99040	2	600-2	1/2	5.58	2.00	1.62	0.44	1.75		⬡	400
99041A		1000-350		5.75	5.97	1.94	0.44	1.75		⬡	600
99042	3	600-2	1/2	5.58	5.51	1.62	0.44	1.75		⬡	400
99043	4	1000-350	1/2	5.75	5.50	1.94	0.44	1.75		⬡	600

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)